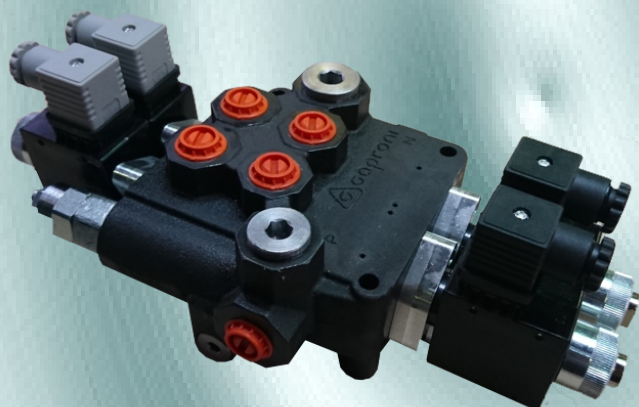
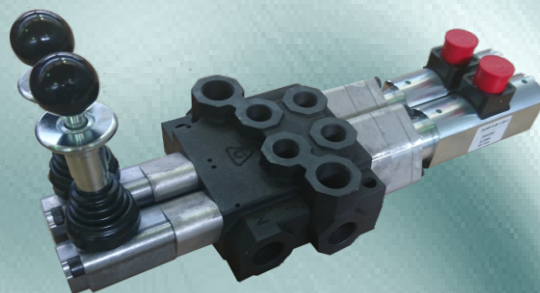
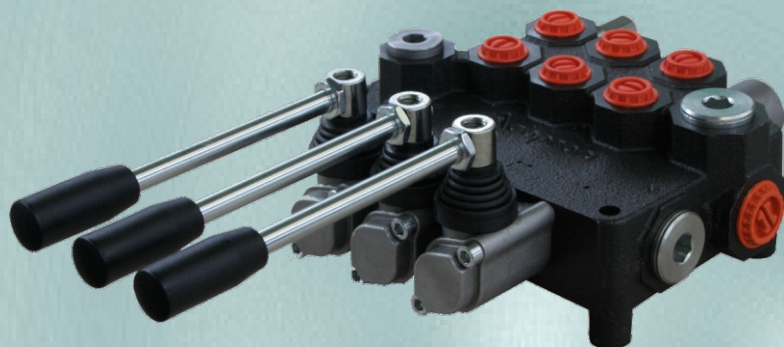




# Caproni



**MONOBLOCK DIRECTIONAL CONTROL VALVES**

## CONTENTS:

## Page

RM20... ..	1/42&2/42
RM25... ..	3/42...5/42
RM35... ..	6/42...8/42
RM40... ..	9/42...14/42
RM80... ..	15/42...20/42
RMF80... ..	21/42...24/42
RMD90... ..	25/42&26/42
MRP70 .....	27/42&28/42
MRP170 .....	29/42&30/42
RME40... (solenoid operated).....	31/42...33/42
RME80... (solenoid operated).....	34/42...36/42
RMEL40... (solenoid + emergency lever).....	37/42...39/42
RMEL80... (solenoid + emergency lever).....	40/42...42/42

**GENERAL DESCRIPTION**

Hydraulic valve RM20 provides change of fluid flow direction, hydro-systems pressure restriction, pump unloading in neutral position of the spools. The valve RM20 is designed to be integrated in hydraulic systems of Mobile and Industrial Machines.

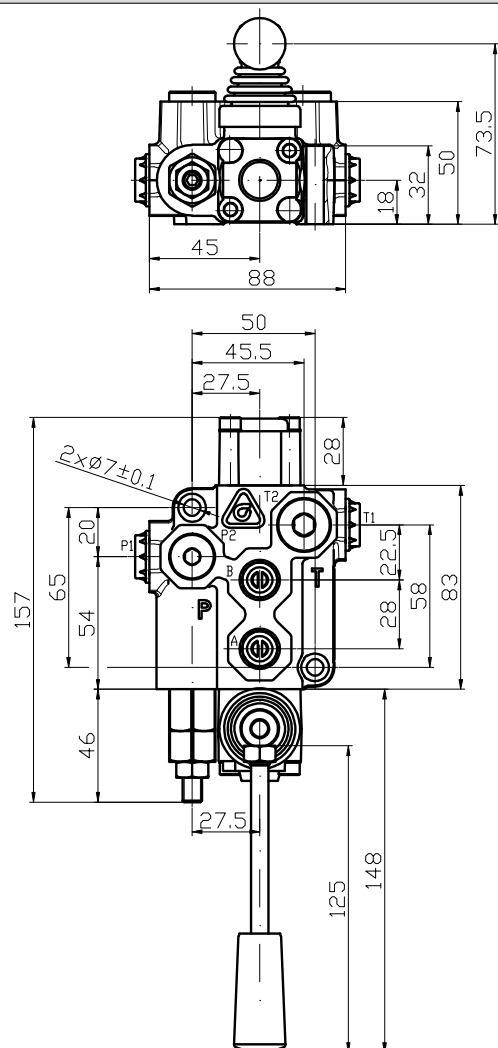
The valve assembly consists of:

A body with integrated relief and check valve, spool, control and spring-centering group of the spool. The valve RM20 provides direct passing of the flow from the pump line to the tank at neutral position (open center).


Options "closed centre" and "carry over" are possible with additional adapters. There are different control options: spring-centering in "neutral" position, detent, automatic kick-out, hydraulic and electro-hydraulic control.

**TECHNICAL DATA**

Rated flow	20 l/min
Max. pressure	P=250 bar; T=30 bar; A,B= 250 bar
Spool stroke	±3,5 mm
Working temperature range	-15...+80 °C
Working liquid	hydraulic oil HLP DIN51524
Liquid viscosity	15...300cSt
Nominal filtration	ISO4406: 19/16 (recommended filter element - 0,025mm mesh)
Internal leakage at 120 bar , t=40°C and viscosity 46cSt	max. 8cm <sup>3</sup> /min; max 2cm <sup>3</sup> /min (special version)
Actuating force	less than 150N
Weight	1,7kg

**DIMENSIONS**

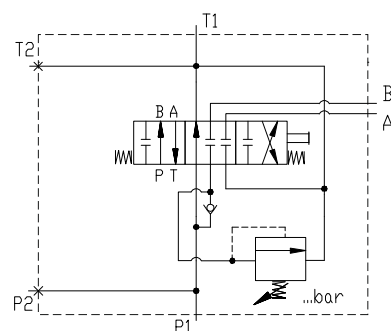
RM20/Q/1CLA1/R/P1T1/G/N











**ORDERING CODE**

RM20 / N / Q / 1 CL A 1 E1 / R / P1T1 / G / N

with check valve - omit  
without check valve - N

relief valve	Code
setting range 5...250bar. (example of required settings 180bar.)	Q
shut-off plug installed	K

spools	Code
	1
	2
	3
	4
	5*
	6
	7
	8*








\* The scheme (spool code 5, 8)  
needs special body with extra machining  
and modified cap (C, CL, CLO control)  
for spool control code 5.

Code	application
N	normal
T	tropical

Code	standard port threads
P1, T1, T2	P2, A, B
G	G3/8"-A G1/4"-A


Code	used connection ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2




Code	hydraulic power output
R	open center (port P connected to T - short plug)
W	closed center (port T1 plugged - long plug)
C	carry over (T1 - with power beyond sleeve)






Code	spool control
1	
2	
3	
4	
5	
6	
7	

Code	lever position
A	at port side A (standard)
B	at port side B

micro switch:  
max. current/voltage - 5A/250V AC  
protection - IP67  
contact configuration



Code	micro switch
omit	without microswitch
E1	
E2	
E3	

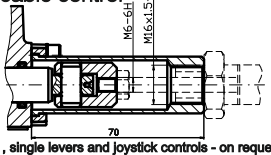operation control	Code	operation control	Code	operation control	Code
without standard hand lever 	C	with standard hand lever 	CL	with standard hand lever at 180° 	CLO
with cable control 	H	without lever, with dust-proof plate 	Z		

**GENERAL DESCRIPTION**

Hydraulic valve RM25 provides change of fluid flow direction, hydro-systems pressure restriction, pump unloading in neutral position of the spools. The valve RM25 is designed to be integrated in hydraulic systems of Mobile and Industrial Machines.

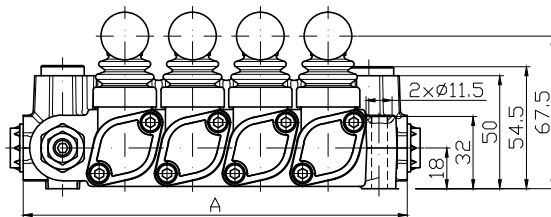
The valve assembly consists of:

A body with integrated relief and check valve, spool, control and spring-centering group of the spool. The valve RM25 provides parallel distribution of the working fluid and direct passing of the flow from the pump line to the tank at neutral position (open center).

Options "closed centre" and "carry over" are possible with additional adapters. There are different control options: spring-centering in "neutral" position and detents.


**TECHNICAL DATA**

Rated flow	25 l/min
Max. pressure	P=250 bar; T=30 bar; A,B= 250 bar
Spool stroke	±3,5 mm
Working temperature range	-15...+80 °C
Working liquid	hydraulic oil HLP DIN51524
Liquid viscosity	15...300cSt
Nominal filtration	ISO4406: 19/16 (recommended filter element - 0,025mm mesh)
Internal leakage at 120 bar , t=40°C and viscosity 46cSt	max. 8cm <sup>3</sup> /min; max 2cm <sup>3</sup> /min (special version)
Actuating force	less than 150N


**DIMENSIONS**


RM25P/04/Q/4x/1CLA1/R/P1T1/G/N

Type	A	B	C	Weight, kg
RM25	80	50	45.5	1.7
RM25P/04	170	140	135.5	4.4

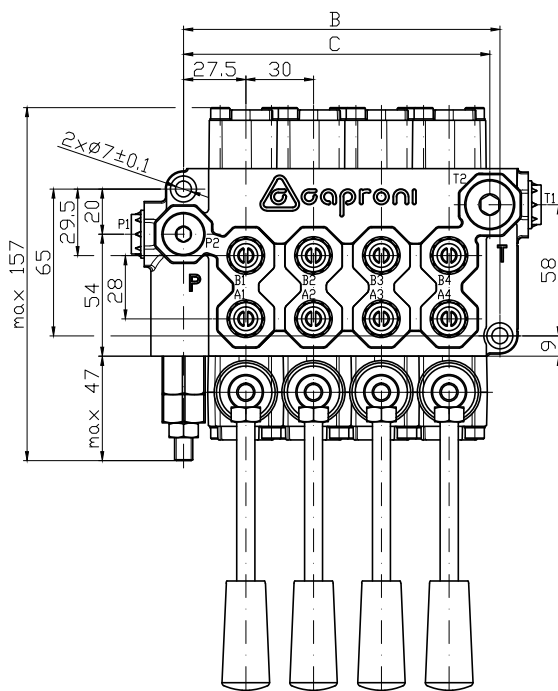

STANDARD PARALLEL CIRCUIT

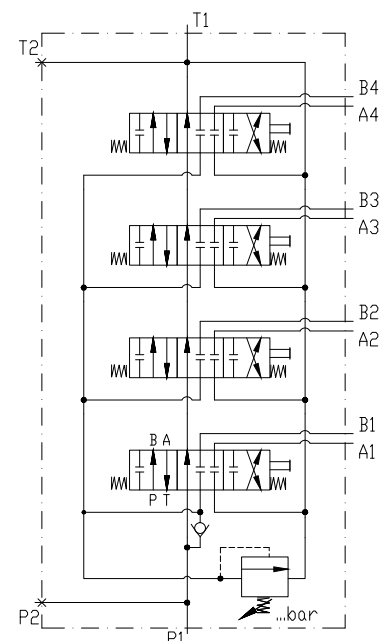

**ORDERING CODE**











RM25P / 0 4 / Q / 1 CL A 1 E1 / R / P1T1 / G / N

parallel connection  
for RM25 - omit

common check valve	Code:
with check valve for RM25 - omit	0
without check valve	N

number of the spools for RM25 - omit
---

relief valve	Code
setting range 30...250bar. (example of required settings 180bar.)	Q Q180
shut-off plug installed	K

spoofs	Code
 <p>N B A N P T</p>	1
 <p>N B A N P T</p>	2
 <p>N B A N P T</p>	3
 <p>N B A N P T</p>	4
 <p>N B A N P T</p>	5*
 <p>N B A N P T</p>	6
 <p>N B A N P T</p>	7
 <p>N B A N P T</p>	8*
 <p>N B A N P T</p>	12
 <p>N B A N P T</p>	13

\* The scheme (spool code 5 , 8)  
needs special body with extra  
machining.

Code	operation control
C	see page 5/42
CL	
CLO	
CLR	
CLS	
H	
Z	
J	

Code	application
N	normal
T	tropical

standard port threads		
Code	P1 , T1 , T2	P2 , A , B
G	G3/8"-A	G1/4"-A
G3/8	G3/8"-A	G3/8"-A


Code	used connection ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2






Code	hydraulic power output
R	open center (port P connected to T - short plug)
W	closed center (port T1 plugged - long plug)
C	carry over (T1 - with power beyond sleeve)

Code	spool control
1	
2	
3	
4	
5	
6	
7	
12	
13	
14	
15	
16	
17	











Code	lever position
A	at port side A(standard)
B	at port side B

micro switch:  
max. current/voltage - 5A/250V AC  
protection - IP67  
contact configuration



Code	  <p>DIN 43650-A</p>
omit	without microswitch
E1	
E2	
E3	

## OPERATION CONTROL

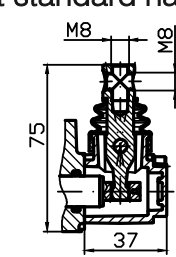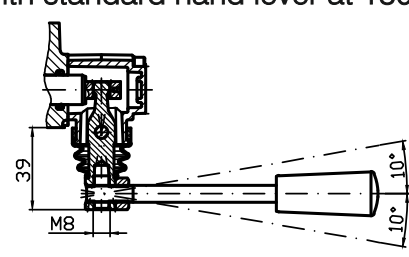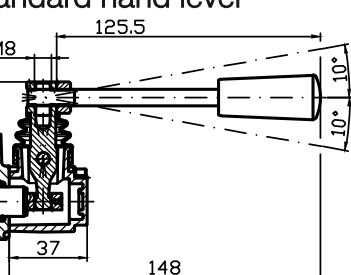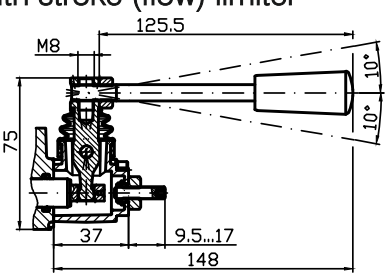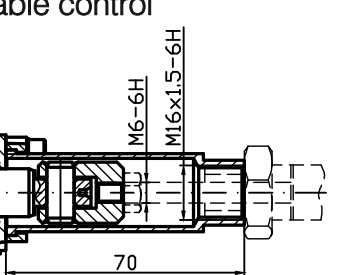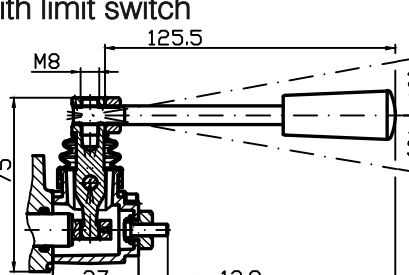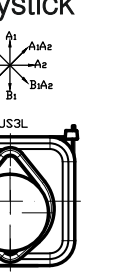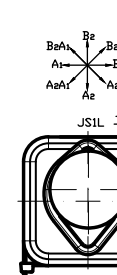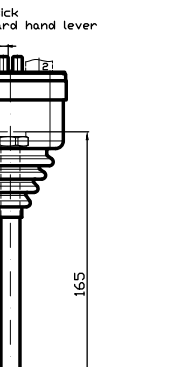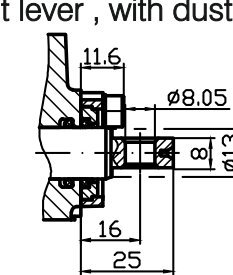operation control	Code	operation control	Code
without standard hand lever 	C	with standard hand lever at 180° 	CLO
with standard hand lever 	CL	with stroke (flow) limiter 	CLR
with cable control  Cables , single levers and joystick controls - on request	H	with limit switch 	CLS
with joystick <div style="display: flex; justify-content: space-around;"> <div>  <p>JS3L fulcrum</p> </div> <div>  <p>JSIL fulcrum</p> </div> </div>  joystick with standard hand lever	JS...	without lever , with dust-proof plate 	Z



**GENERAL DESCRIPTION**

Hydraulic valve RM35 provides change of fluid flow direction, hydro-systems pressure restriction, pump unloading in neutral position of the spools. The valve RM35 is designed to be integrated in hydraulic systems of Mobile and Industrial Machines.

The valve assembly consists of:

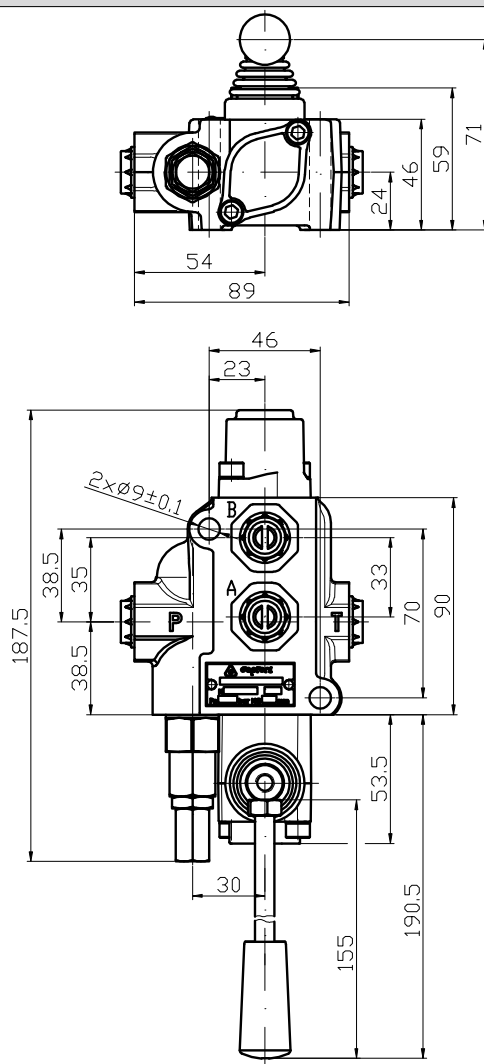
A body with integrated relief and check valve, spool, control and spring-centering group of the spool.

The valve RM35 provides direct passing of the flow from the pump line to the tank at neutral position (open center).


There is different control options: spring-centering in "neutral" position, detent, automatic kick-out, hydraulic and electro-hydraulic control.

**TECHNICAL DATA**

Rated flow	35 l/min
Max. pressure	P=250 bar; T=50 bar; A,B= 300 bar
Spool stroke	±6 mm
Working temperature range	-15...+80 °C
Working liquid	hydraulic oil HLP DIN51524
Liquid viscosity	15...300cSt
Nominal filtration	ISO4406: 19/16 (recommended filter element - 0,025mm mesh)
Internal leakage at 120 bar , t=40°C and viscosity 46cSt	max. 8cm <sup>3</sup> /min; max 2cm <sup>3</sup> /min (special version)
Actuating force	less than 200N
Weight	2,2kg

**DIMENSIONS**

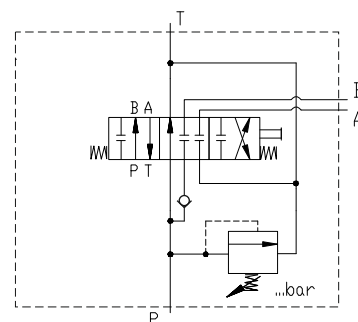
RM35/Q/1CLA1/G/N

















**ORDERING CODE**

RM35EHI / N / Q / 1 CL A 1 E1 / G / N



















type of control	Code
without control	omit
ON-OFF internal electro-hydraulic	EHI
ON-OFF external electro-hydraulic	EHE
ON-OFF electro-pneumatic	EPC
ON-OFF hydraulic	HC
ON-OFF pneumatic	PC

with check valve - omit  
without check valve - N

relief valve	Code
setting range 5...250bar. (example of required settings 180bar.)	Q Q180
shut-off plug installed	K

spools	Code
	1
	2
	3
	4*
	5*
	6
	7
	8*
	9*
	10*
	12
	13

\* The scheme (spool code 4, 5, 8, 9 and 10)  
needs special body with extra machining.

Code	spool control
1	
2	
3	
4	
5	
6	
7	
9	
10	
11*	 Adjustment range of automatic kick-out feature - 60...180bar
12	
13	
14	
15	
16	
17	
SD1	
SD10	






Code	lever position
A	at port side A (standard)
B	at port side B


Code	operation control
C	
CL	
CLO	
CLR	
CLS	
SHL	
SVL	
CP	
H	
Z	

see page 8/42

standard port threads
Code P, T, A, B
M M18x1,5-6H
G G3/8"-A
U 3/4-16UNF-2B











Code	application
N	normal
T	tropical

micro switch: max. current/voltage - 5A/250V AC protection - IP67 contact configuration	
	
Code	
omit	without microswitch
E1	
E2	
E3	

Code	spool control
20-12	12VDC
20-24	24VDC
20-11	110VRAC
20-22	220VRAC
30-12	12VDC
30-24	24VDC
30-11	110VRAC
30-22	220VRAC
32	ON-OFF HC & PC
19	

\* The kit (spool control code 11)  
needs special spool.

**OPERATION CONTROL**

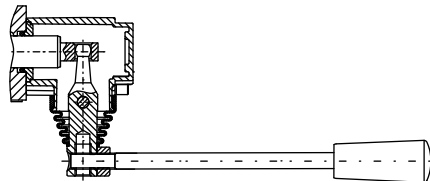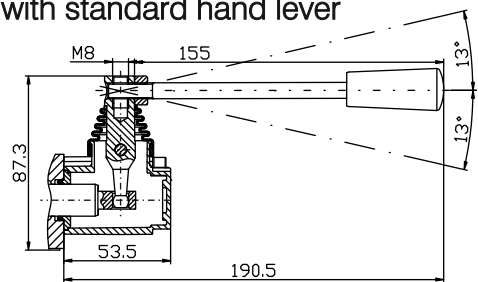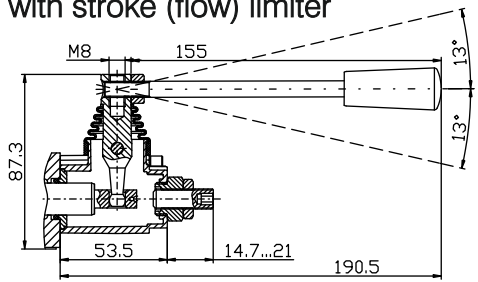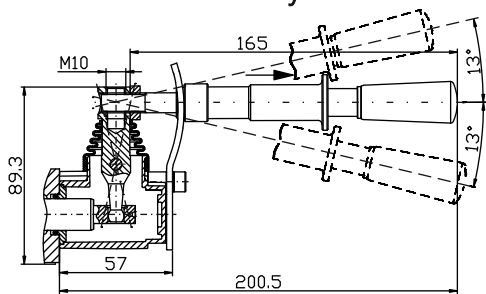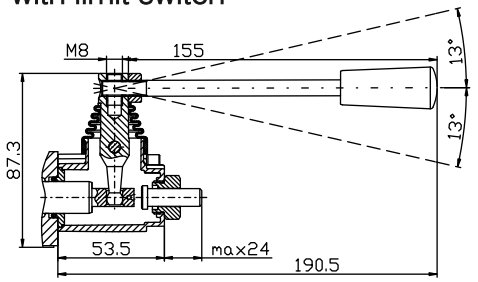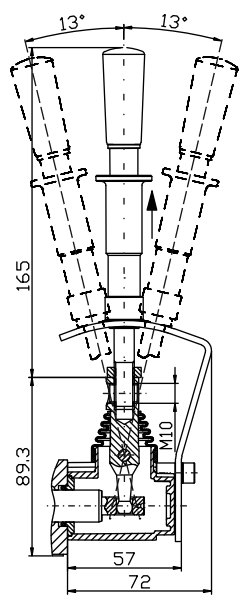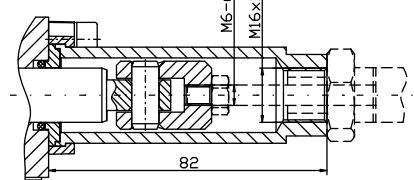operation control	Code	operation control	Code
without standard hand lever 	C	with standard hand lever at 180° 	CLO
with standard hand lever 	CL	with stroke (flow) limiter 	CLR
with horizontal safety lever 	SHL	with limit switch 	CLS
with vertical safety lever 	SVL	with protection cap 	CP
		with cable control  Cables , single levers and joystick controls - on request	H
		without lever , with dust-proof plate 	Z

**GENERAL DESCRIPTION**

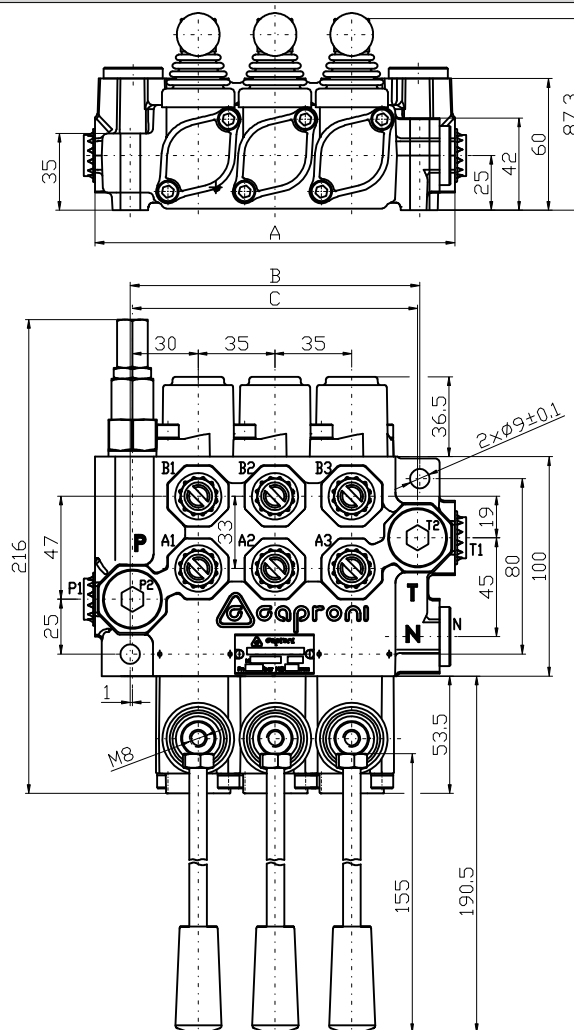
Hydraulic valve RM40 provides change of fluid flow direction, hydro-systems pressure restriction, pump unloading in neutral position of the spools. The valve RM40 is designed to be integrated in hydraulic systems of Mobile and Industrial Machines.

The valve assembly consists of:

A body with integrated relief and check valves, spools, control and spring-centering group of the spools. The valve RM40 provides parallel distribution of the working liquid and direct passing of the flow from the pump line to the tank at neutral position (open center). Options "closed centre" and "carry over" are possible with additional adapters. There are different control options: spring-centering in "neutral" position, detent, automatic kick-out, hydraulic and electro-hydraulic control.

**TECHNICAL DATA**


Rated flow	40 l/min
Max. pressure	P=250 bar; T=50 bar; A,B= 300 bar
Spool stroke	±6 mm
Working temperature range	-15...+80 °C
Working liquid	hydraulic oil HLP DIN51524
Liquid viscosity	15...300cSt
Nominal filtration	ISO4406: 19/16 (recommended filter element - 0,025mm mesh)
Internal leakage at 120 bar , t=40°C and viscosity 46cSt	max. 8cm <sup>3</sup> /min; max 2cm <sup>3</sup> /min (special version)
Actuating force	less than 200N

**DIMENSIONS**


RM40P/03/Q/3x/1CLA1/R/P1T1/G/N

Type	A	B	C	Weight, kg
RM40	87	62	-	2.6
RM40P/02	129	97	95	4.4
RM40P/03	164	132	130	5.9
RM40P/04	199	167	165	7.3
RM40P/05	234	202	200	8.8
RM40P/06	269	237	235	10.3
RM40P/07	304	272	270	11.8
RM40P/08	339	307	305	13.4

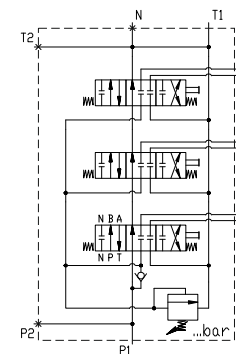STANDARD PARALLEL CIRCUIT



ORDERING CODE

RM40PEHI / 0 3 / Q / 1 CL A 1 E1 / R / P1T1 / G / N













parallel connection  
for RM40 - omit

type of control	Code
without control	omit
On-Off internal electro-hydraulic	EHI
On-Off external electro-hydraulic	EHE
On-Off electro-pneumatic	EPC
On-Off hydraulic	HC
On-Off pneumatic	PC

common check valve	Code
with check valve for RM40 - omit	0
without check valve	N

number of the spools  
for RM40 - omit

relief valve	Code
setting range 5...250bar (example of required settings 180bar)	Q
shut-off plug installed	K

spools	Code
	1
	2
	3
	4
	5
	6
	7
	8*
	10*
	11*
	12
	13










\* The scheme (spool code 8, 10 and 11)  
needs special body with extra machining.






standard port threads			
Code	P1, P2	A, B	T1, T2, N
M	M22x1,5-6H	M18x1,5-6H	M22x1,5-6H
G	G1/2"-A	G3/8"-A	G1/2"-A
U	7/8-14UNF-2B	3/4-16UNF-2B	7/8-14UNF-2B
G1/2	G1/2"-A		












Code	application
N	normal
T	tropical

Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)
CS	short carry over connection

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

Code	spool control
1	
2	
3	
4	
5	
6	
7	
9	
10	

Code	micro switch: max. current/voltage - 5A/250V AC protection - IP67 contact configuration
	 NO NC
	 DIN 43650-A
omit	without microswitch
E1	
E2	
E3	

Code	spool control
R***	
11*	 Adjustment range of automatic kick-out feature - 60...180bar
12	
13	
14	
15	
16	
17	
20-12	12VDC
20-24	24VDC
20-11	110VRAC
20-22	220VRAC
30-12	12VDC
30-24	24VDC
30-11	110VRAC
30-22	220VRAC
32	ON-OFF HC & PC
SD1	
SD10	
19	

\* The kit (spool control code 11) needs special spool.











Code	operation control
C	see page 11/42
CL	
CLO	
CLR	
CLS	
CP	
H	
Z	see page 12/42
J...	

Code	lever position
A	at port side A (standard)
B	at port side B

\*\* Repeat for each spool. In case of  
Identical spools example ordering code is:  
RM40P / 03 / Q / 3x / 1CL A1 / R / P1T1 / G / N





\*\*\* See page 14/42

**OPERATION CONTROL**

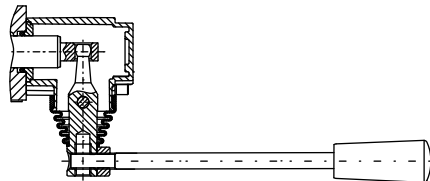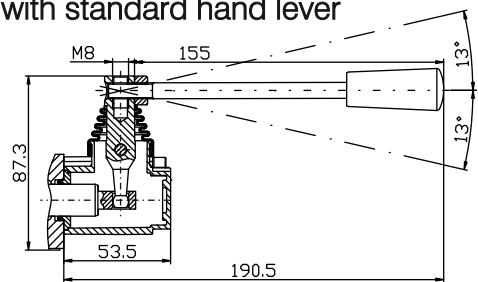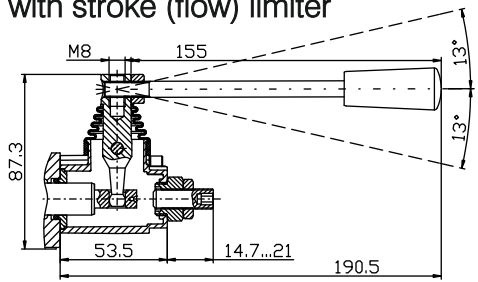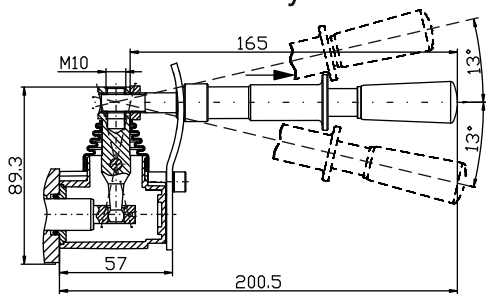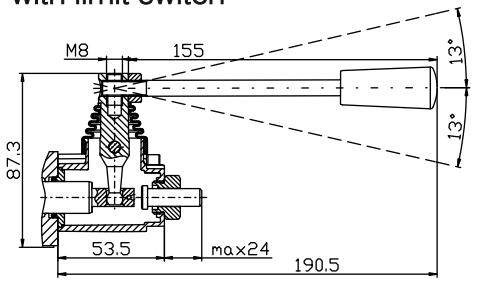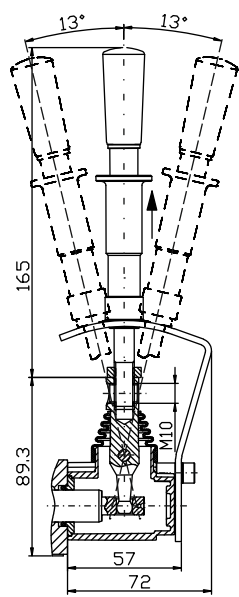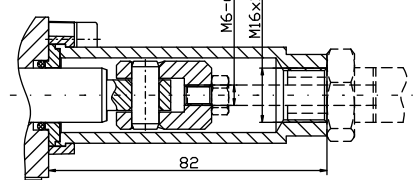operation control	Code	operation control	Code
without standard hand lever 	C	with standard hand lever at 180° 	CLO
with standard hand lever 	CL	with stroke (flow) limiter 	CLR
with horizontal safety lever 	SHL	with limit switch 	CLS
with vertical safety lever 	SVL	with protection cap 	CP
		with cable control  Cables , single levers and joystick controls - on request	H
		without lever , with dust-proof plate 	Z


**OPERATION CONTROL**

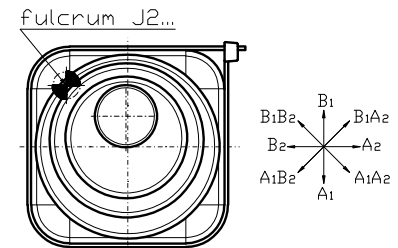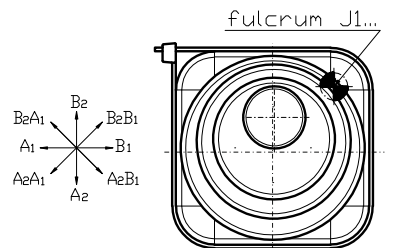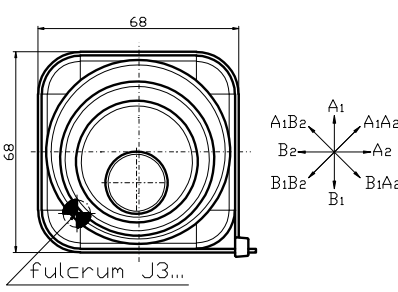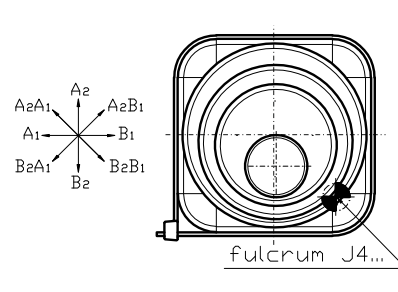Working scheme by assembly on the side of threaded ports A (standard)

	Code		Code
	<b>J2...</b>		<b>J1...</b>
	<b>J3...</b>		<b>J4...</b>


joystick  
with standard hand lever

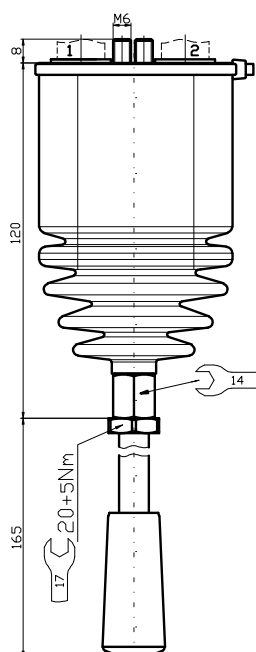
Code: J1L ; J2L ; J3L ; J4L



joystick  
without standard hand lever

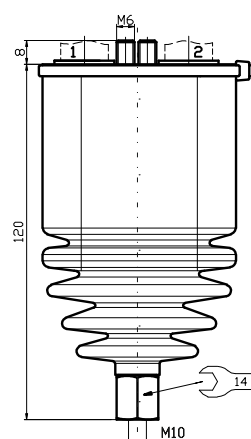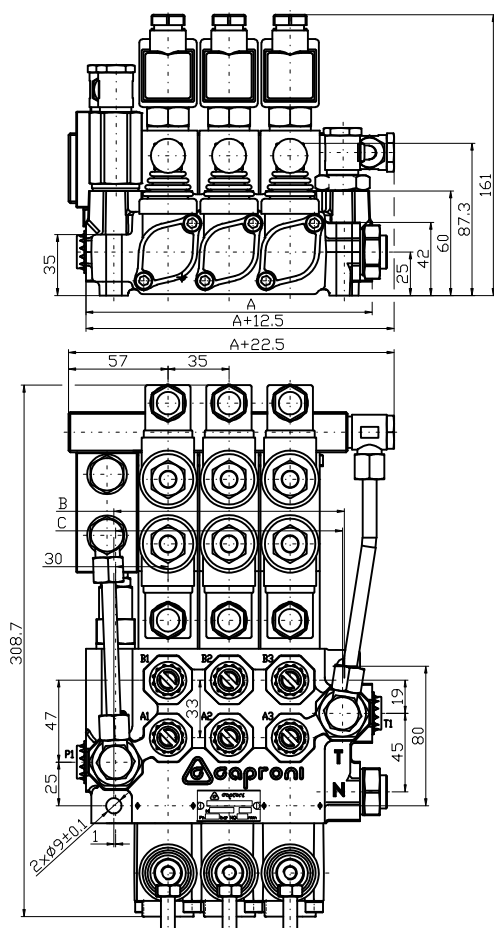Code: J1 ; J2 ; J3 ; J4







RM40PEHI/03/Q/3x/1CLA20-24/R/P1T1/G/N

On/Off electrohydraulic control (internal)  
operating features:

Pilot pressure - 10...50 bar  
Max. pilot flow - 8 l/min  
Filtration - 25  $\mu$ m  
Coil - 18W , duty cycle ED 100%  
Voltage options - 12V DC , 24V DC ,  
110V RAC , 220V RAC  
Integrated back pressure valve

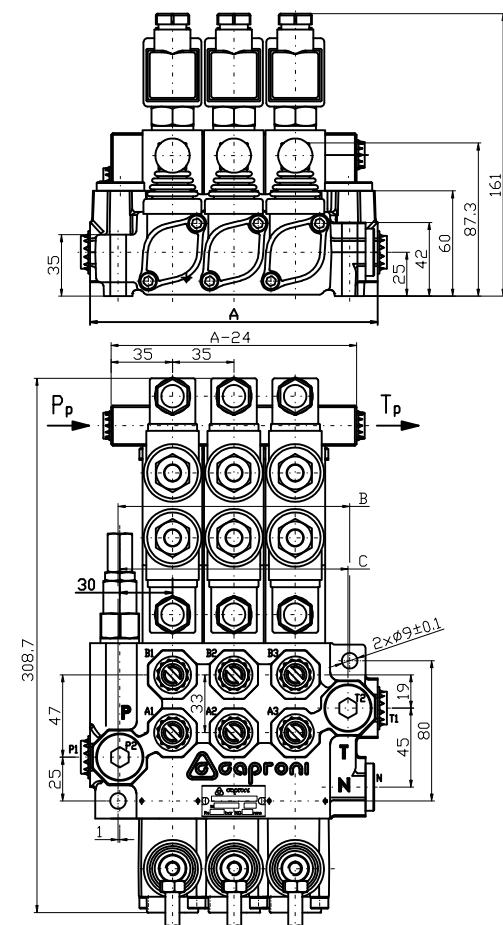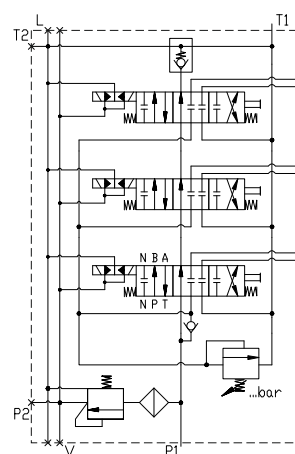Scheme




RM40PEHE/03/Q/3x/1CLA20-24/R/P1T1/G/N

On/Off electrohydraulic control (external)  
operating features:




Pilot pressure Pp - 10...50 bar  
Max. pilot flow - 8 l/min  
Filtration - 25  $\mu$ m  
Coil - 18W , duty cycle ED 100%  
Voltage options - 12V DC , 24V DC ,  
110V RAC , 220V RAC  
Pp , Tp - G1/4

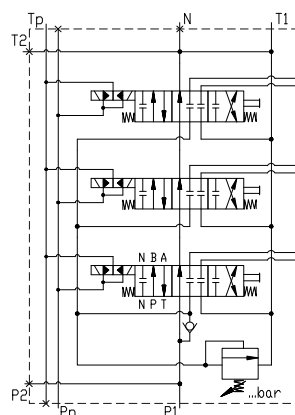Scheme





RM40/Q/1LPRZRLAR/R/P1T1/G/T

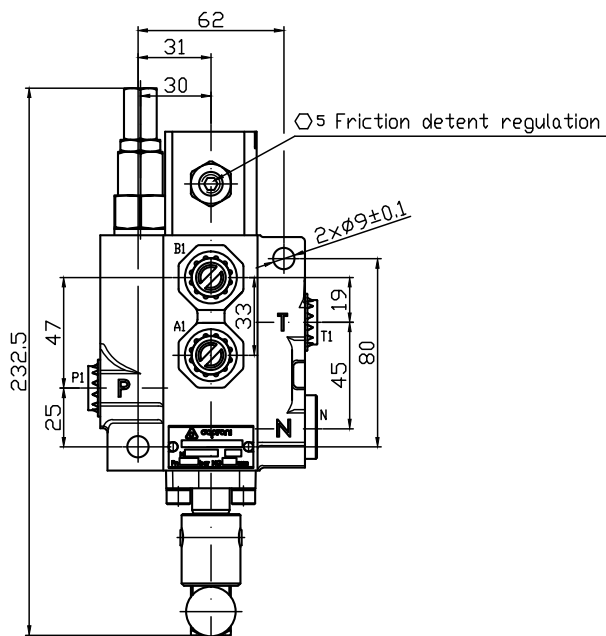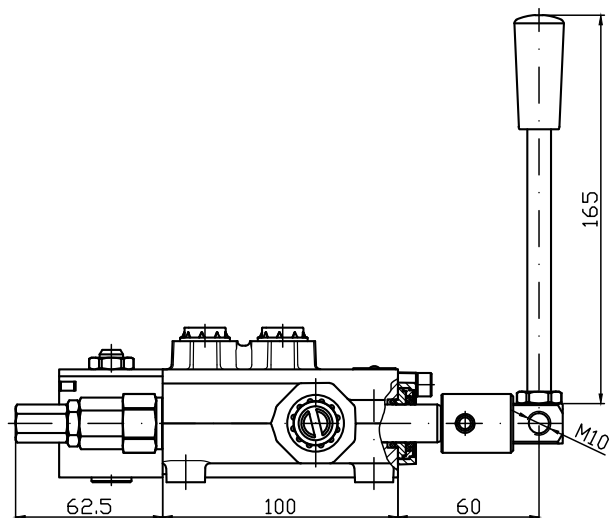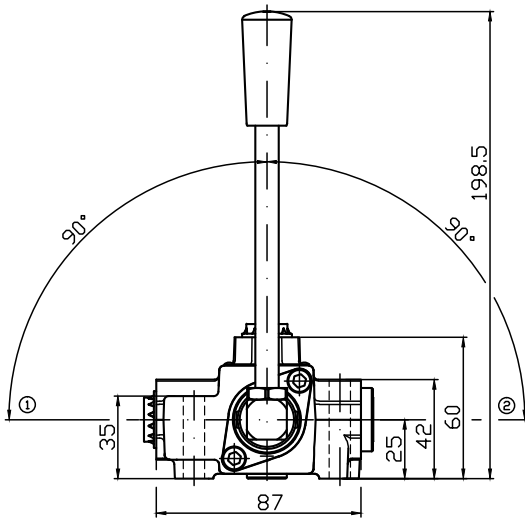


Rotary control valve:

Smooth positioning the rotary lever in a set position by friction detent with notch in the neutral position. The rotary control valve provides good speed control for hydraulic motors (winch applications).

Available for marine applications – stainless steel spool and lever, all other parts – painted.

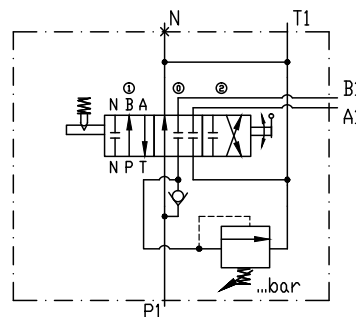Scheme



## GENERAL DESCRIPTION

Hydraulic valve RM80 provides change of fluid flow direction, hydro-systems pressure restriction, pump unloading in neutral position of the spools. The valve RM80 is designed to be integrated in hydraulic systems of Mobile and Industrial Machines.

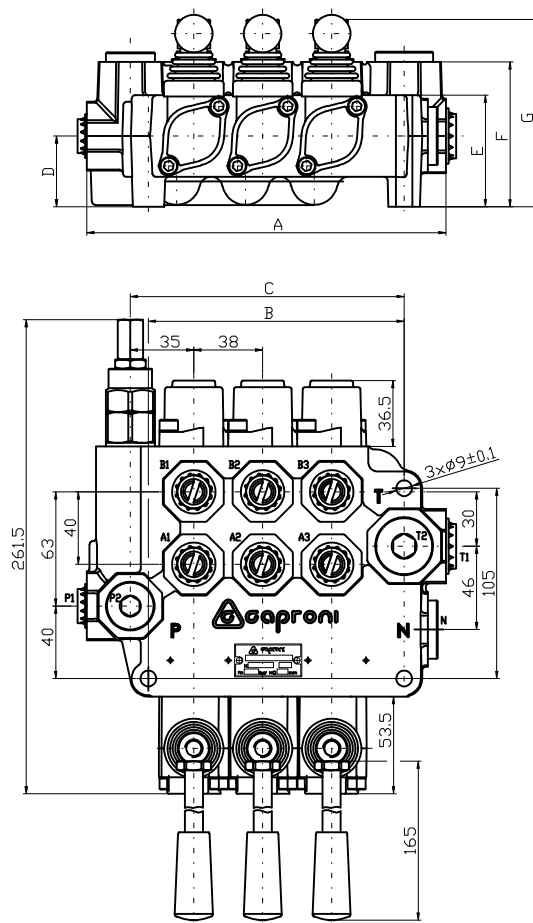
The valve assembly consists of:

A body with integrated relief and check valves, spools, control and spring-centering group of the spools. The valve RM80 provides parallel distribution of the working liquid and direct passing of the flow from the pump line to the tank at neutral position (open center). Options "closed centre" and "carry over" are possible with additional adapters. There are different control options: spring-centering in "neutral" position, detent, automatic kick-out, hydraulic and electro-hydraulic control.

## TECHNICAL DATA

Rated flow	80 l/min
Max. pressure	P=250 bar; T=50 bar; A,B= 300 bar
Spool stroke	±7 mm
Working temperature range	-15...+80 °C
Working liquid	hydraulic oil HLP DIN51524
Liquid viscosity	15...300cSt
Nominal filtration	ISO4406: 19/16 (recommended filter element - 0,025mm mesh)
Internal leakage at 120 bar , t=40°C and viscosity 46cSt	max. 8cm <sup>3</sup> /min; max 2cm <sup>3</sup> /min (special version)
Actuating force	less than 280N


## DIMENSIONS




RM80P/3/Q/3x/1CLA1/R/P1T1/G/N

Type	A	B	C	D	E	F	G	Weight, kg
parallel								
serial								
RM80	108	65	-	24	46.5	65	88.3	4.0
RM80P/2	160	103	113					7.4
RM80P/3	198	141	151					9.7
RM80P/4	236	179	189	39	61.5	80	103.3	12.0
RM80P/5	274	217	227					14.3
RM80P/6	312	255	265					16.7


STANDARD PARALLEL CIRCUIT



STANDARD SERIES CIRCUIT



TANDEM CIRCUIT



## ORDERING CODE

RM80PEHI / 3 / Q / 1 CL A 1 E1 / R / P1T1 / G / N













type of connection	Code
for RM80	omit
Parallel	P
Series*	S
Tandem (P+S)*	T

\* The scheme (connection type S and T) needs special body.

type of control	Code
without control	omit
On-Off internal electro-hydraulic	EHI
On-Off external electro-hydraulic	EHE
On-Off electro-pneumatic	EPC
On-Off hydraulic	HC
On-Off pneumatic	PC

number of the spools  
for RM80 - omit

relief valve	Code
setting range 20...300bar (example of required settings 180bar)	Q
shut-off plug installed	K

spools	Code
	1
	2
	3
	4
	5
	6
	7
	8*
	9*
	10
	12
	13

















\* The scheme (spool code 8 and 9) needs special body with extra machining.





standard port threads		
Code	P1, P2, A, B	T1, T2, N
M	M22x1,5-6H	M26x1,5-6H
G	G1/2"-A	G3/4"-A
U	7/8-14UNF-2B	1 1/16-12UN-2B

Code	application
N	normal
T	tropical






Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)
CS	short carry over connection

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

Code	spool control
1	
2	
3	
4	
5	
6	
7	
9	
11*	 Adjustment range of automatic kick-out feature - 60...180bar
12	
13	
14	
15	
16	
17	
19*	 Adjustment range of automatic kick-out feature - 60...180bar

Code	micro switch: max. current/voltage - 5A/250V AC protection - IP67 contact configuration
	
	DIN 43650-A
omit	without microswitch
E1	
E2	
E3	

Code	operation control
C	
CL	
CLO	
CLR	
CLS	
CP	
H	
Z	
J...	see page 18/42

Code	spool control
20-12	12VDC
20-24	24VDC
20-11	110VRAC
20-22	220VRAC
30-12	12VDC
30-24	24VDC
30-11	110VRAC
30-22	220VRAC
SD1	
SD5	
SD10	
32	ON-OFF HC & PC 
R***	











\* The kit (spool control code 11 and 19) need special spool.

\*\* Repeat for each spool. In case of identical spools ordering code example is:  
RM80P / 3 / Q / 3x / 1CL A1 / R / P1T1 / G / N

\*\*\* See page 20/42





Code	lever position
A	at port side A (standard)
B	at port side B

**OPERATION CONTROL**

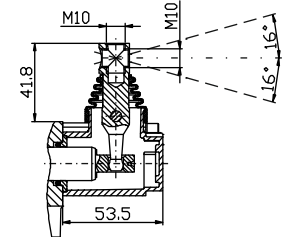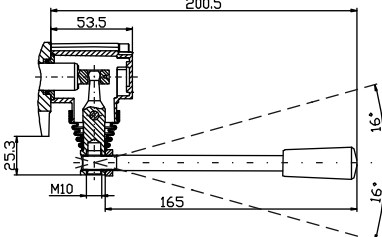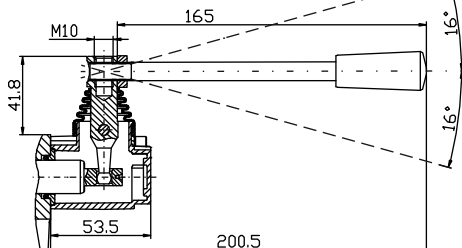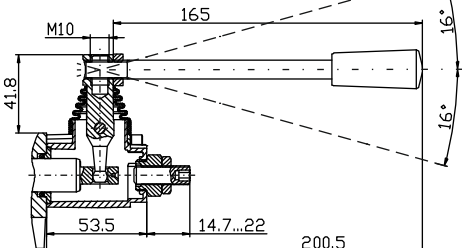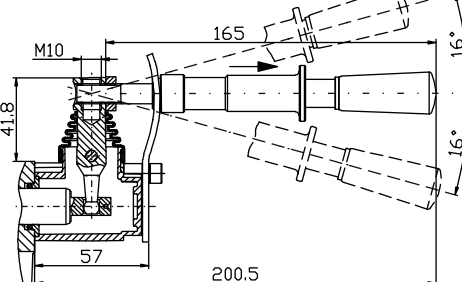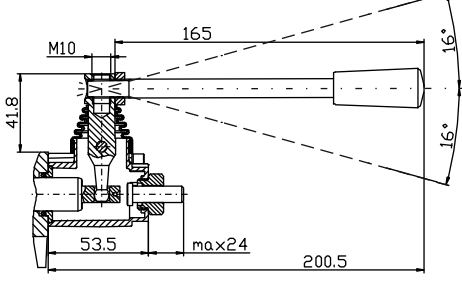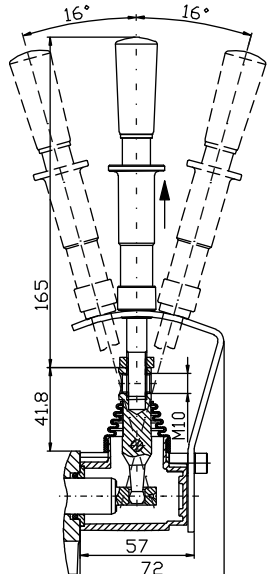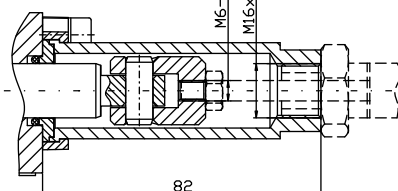operation control	Code	operation control	Code
without standard hand lever 	C	with standard hand lever at 180° 	CLO
with standard hand lever 	CL	with stroke (flow) limiter 	CLR
with horizontal safety lever 	SHL	with limit switch 	CLS
with vertical safety lever 	SVL	with protection cap 	CP
		with cable control  Cables , single levers and joystick controls - on request	H
		without lever , with dust-proof plate 	Z


**OPERATION CONTROL**

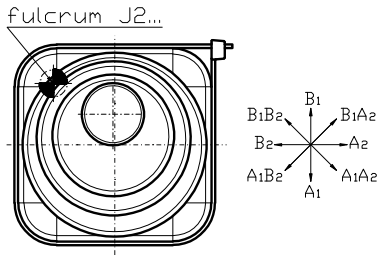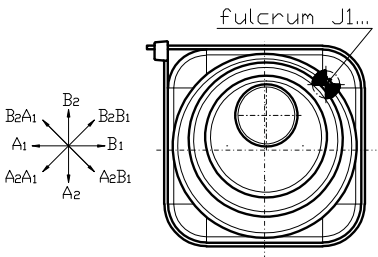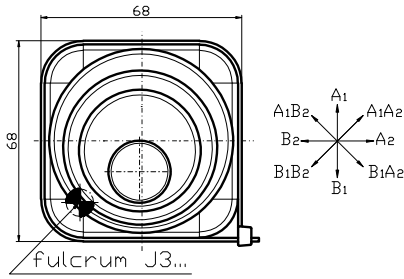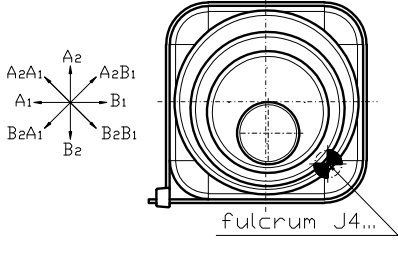Working scheme by assembly on the side of threaded ports A (standard)

	Code		Code
	<b>J2...</b>		<b>J1...</b>
	<b>J3...</b>		<b>J4...</b>


joystick  
with standard hand lever

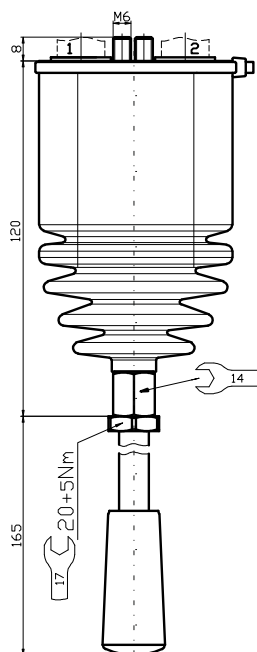
Code: J1L ; J2L ; J3L ; J4L



joystick  
without standard hand lever

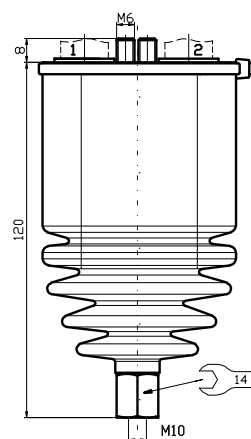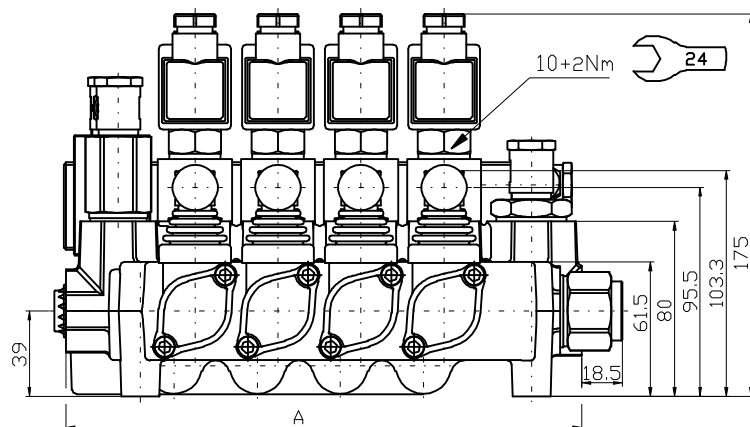Code: J1 ; J2 ; J3 ; J4





RM80PEHI/4/Q/4x1CLA20-24/R/P1T1/G/N

On/Off electrohydraulic control (internal)  
operating features:

Pilot pressure - 10...50 bar

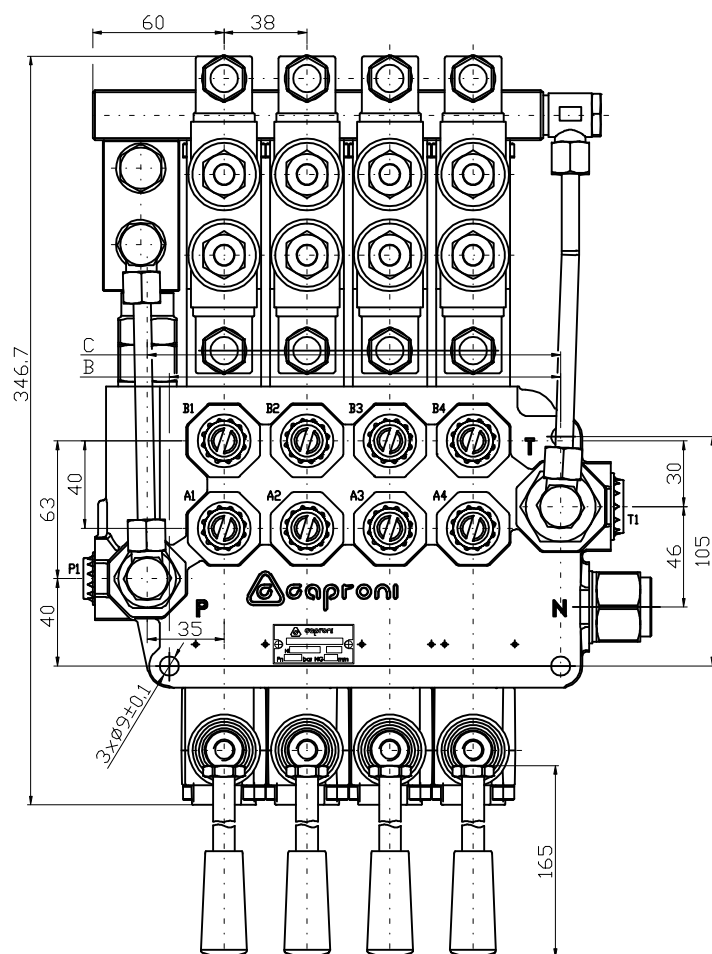
Max. pilot flow - 8 l/min

Filtration - 25 mm


Coil - 18W, duty cycle ED 100%

Voltage options - 12V DC, 24V DC,  
110V RAC, 220V RAC




Integrated back pressure valve



Scheme

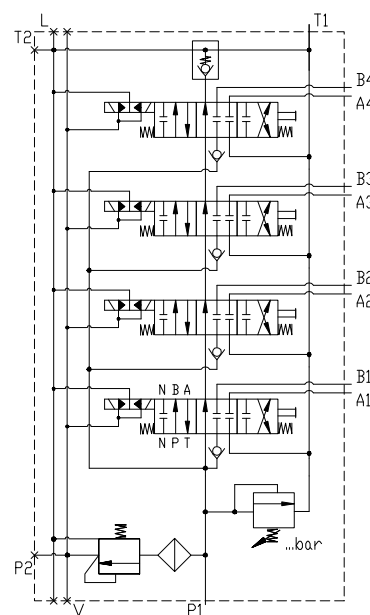


RM80/Q/1LPRZRLAR/R/P1T1/G/T

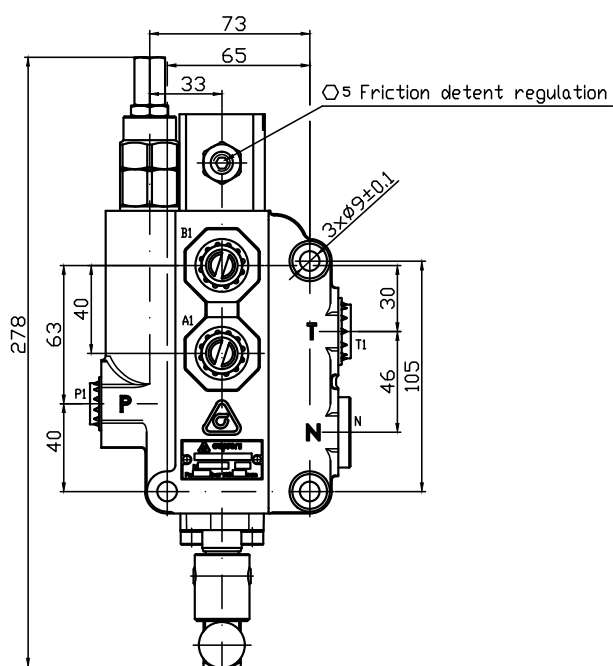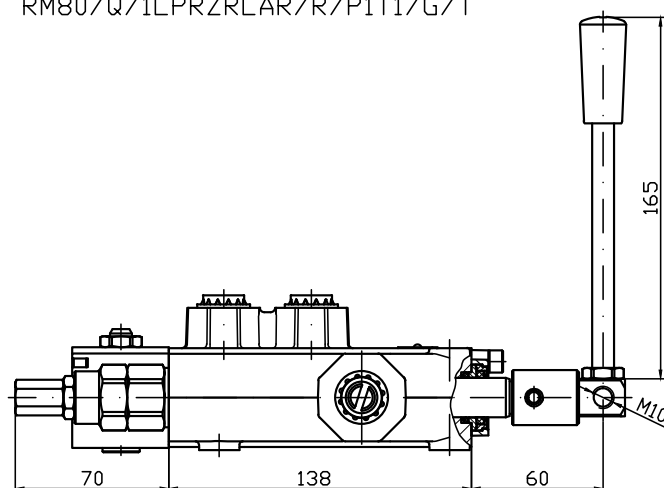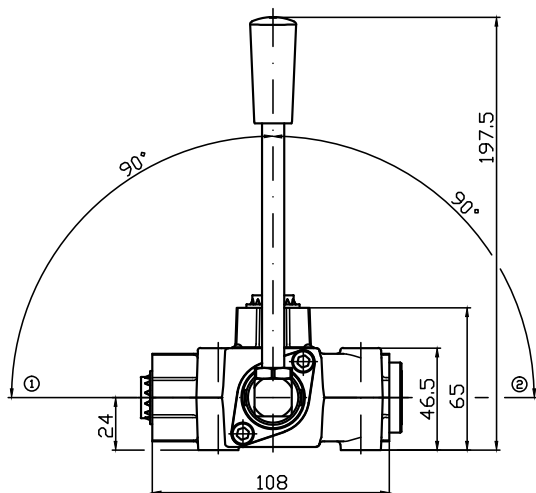

Rotary control valve:  
Smooth positioning the rotary lever in a set position by friction detent with notch in the neutral position. The rotary control valve provides good speed control for hydraulic motors (winch applications). Available for marine applications – stainless steel spool and lever, all other parts – painted.

Scheme







## GENERAL DESCRIPTION

Hydraulic valve RMF80 provides change of fluid flow direction, hydro-systems pressure restriction, pump unloading in neutral position of the spools. Integrated pressure compensated flow control valve provide flow adjustment of the priority flow (PF) and exceeding flow (EF) is sent to tank. Best performance of the valve is assured when inlet flow is at least 10% bigger than priority flow. Priority flow is constant regardless of pressure variations, thus flow out the work port remains smooth and constant regardless of changes in load conditions. The valve RM80 is designed to be integrated in hydraulic systems of Mobile and Industrial Machines.

The valve assembly consists of:

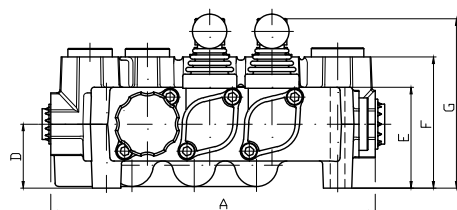
A body with integrated relief and check valves, flow control valve, spools, control and spring-centering group of the spools. The valve RMF80 provides distribution of the working liquid and direct passing of the flow from the pump line to the tank at neutral position (open center). Options "closed centre" and "carry over" are possible with additional adapters. There are different control options: spring-centering in "neutral" position, detent, automatic kick-out, hydraulic, electro-hydraulic control, pneumatic and electro-pneumatic control.

## TECHNICAL DATA


Rated flow	80 l/min
Max. inlet flow rate	95 l/min
Flow control valve setting range	5...80 l/min.
Max. pressure	P=250 bar; T=50 bar; A,B= 300 bar
Spool stroke	±7 mm
Working temperature range	-15...+80 °C
Working liquid	hydraulic oil HLP DIN51524
Liquid viscosity	15...300cSt
Nominal filtration	ISO4406: 19/16 (recommended filter element - 0,025mm mesh)
Internal leakage at 120 bar , t=40°C and viscosity 46cSt	max. 8cm <sup>3</sup> /min; max 2cm <sup>3</sup> /min (special version)
Actuating force	less than 280N

## DIMENSIONS


RMF80/2/Q/F/2x/1CLA1/R/P1T1/G/N



Type	A	B	C	D	E	F	G	Weight, kg
RMF80	160	103	113					7.4
RMF80P/2	198	141	151					9.7
RMF80P/3	236	179	189	39	61.5	80	103.3	12.0
RMF80P/4	274	217	227					14.3
RMF80P/5	312	255	265					16.7

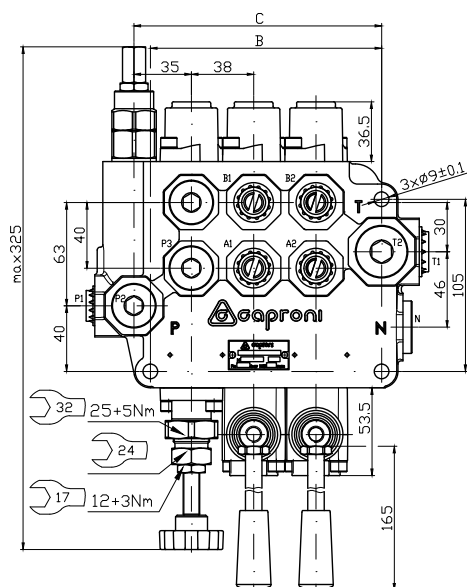

## STANDARD PARALLEL CIRCUIT

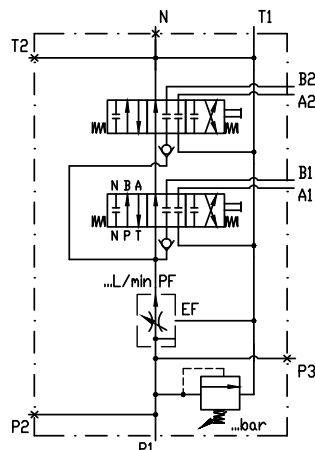

## Standard port threads

Code	P1, P2, P3, A, B	T1, T2, N
M	M22x1.5-6H	M26x1.5-6H
G	G1/2"-A	G3/4"-A
U	7/8-14UNF-2B	1 1/16-12UN-2B

## ORDERING CODE

RMF80EHI / 3 / Q / F / 1 CL A 1 E1 / R / P1T1 / G / N

type of control	Code
without control	omit
On-Off internal electro-hydraulic	EHI
On-Off external electro-hydraulic	EHE
On-Off electro-pneumatic	EPC
On-Off hydraulic	HC
On-Off pneumatic	PC

number of the spools for RMF80 - omit

relief valve	Code
setting range 20...300bar (example of required settings 180bar)	Q
shut-off plug installed	K

flow control valve	Code
setting range 5...80bar	F
required setting 60l/min	F60

spools	Code
	1
	2
	3
	4
	5
	6
	7
	8*
	9*
	10
	12
	13

\* The scheme (spool code 8 and 9) needs special body with extra machining.

standard port threads	
Code	P1, P2, A, B
M	M22x1,5-6H
G	G1/2"-A
U	7/8-14UNF-2B
T1, T2, N	
M	M26x1,5-6H
G	G3/4"-A
U	1 1/16-12UN-2B

Code	application
N	normal
T	tropical

Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

Code	spool control
1	
2	
3	
4	
5	
6	
7	
9	
11*	 Adjustment range of automatic kick-out feature - 60...180bar

Code	micro switch: max. current/voltage - 5A/250V AC protection - IP67 contact configuration
omit	without microswitch
E1	
E2	
E3	

Code	spool control
12	20-12 12VDC 20-24 24VDC 20-11 110VRAC 20-22 220VRAC
13	
14	30-12 12VDC 30-24 24VDC 30-11 110VRAC 30-22 220VRAC
15	
16	SD1
17	SD5
32	ON-OFF HC & PC SD10

\* The kit (spool control code 11) needs special spool.

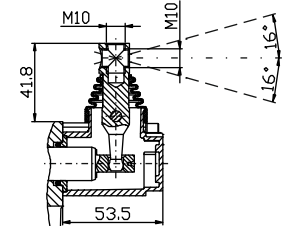
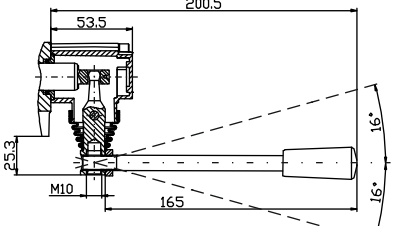
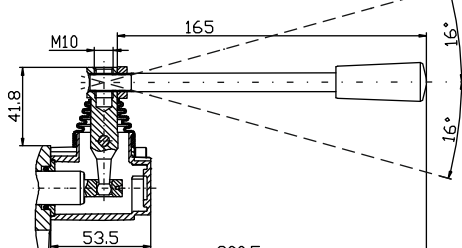
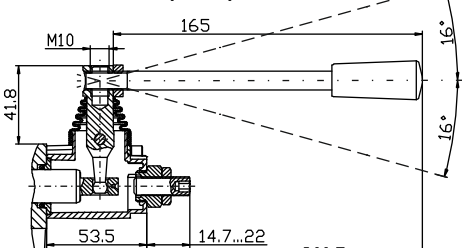
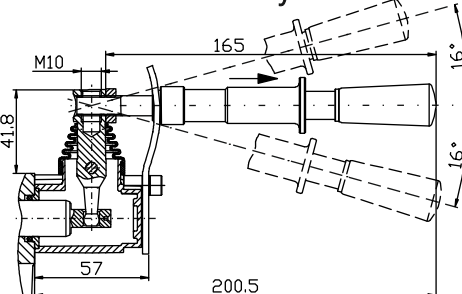
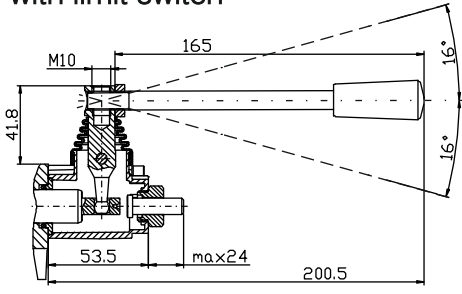
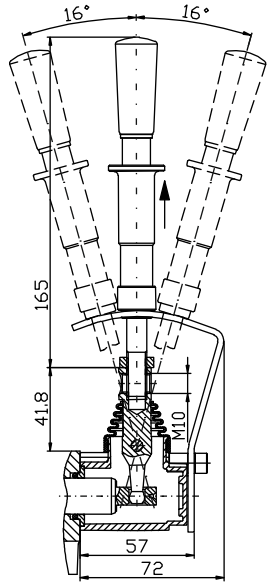

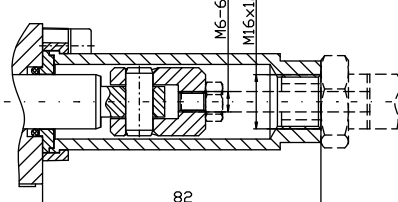

Code	operation control
C	
CL	
CLO	
CLR	
CLS	
CP	
H	
Z	
J...	see page 24/42

Code	lever position
A	at port side A (standard)
B	at port side B

\*\* Repeat for each spool. In case of identical spools ordering code example is:  
RMF80 / 3 / Q / F / 3x / 1CL A1 / R / P1T1 / G / N







## OPERATION CONTROL

operation control	Code	operation control	Code
without standard hand lever 	C	with standard hand lever at 180° 	CLO
with standard hand lever 	CL	with stroke (flow) limiter 	CLR
with horizontal safety lever 	SHL	with limit switch 	CLS
with vertical safety lever 	SVL	with protection cap 	CP
		with cable control  Cables , single levers and joystick controls - on request	H
		without lever , with dust-proof plate 	Z

**OPERATION CONTROL**

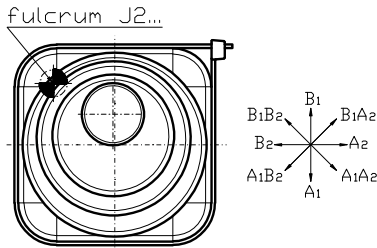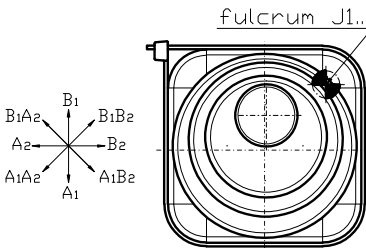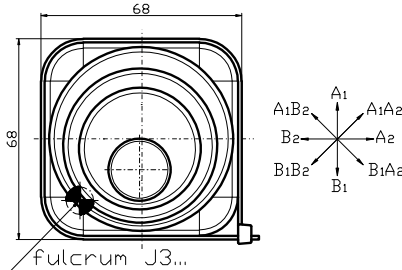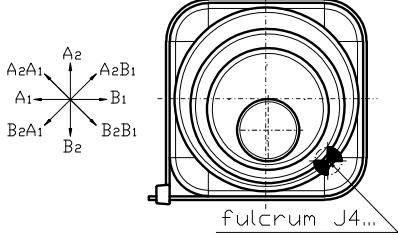Working scheme by assembly on the side of threaded ports A (standard)



	Code		Code
	<b>J2...</b>		<b>J1...</b>
	<b>J3...</b>		<b>J4...</b>

joystick  
with standard hand lever

Code: J1L ; J2L ; J3L ; J4L

joystick  
without standard hand lever

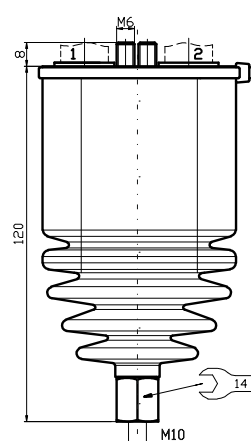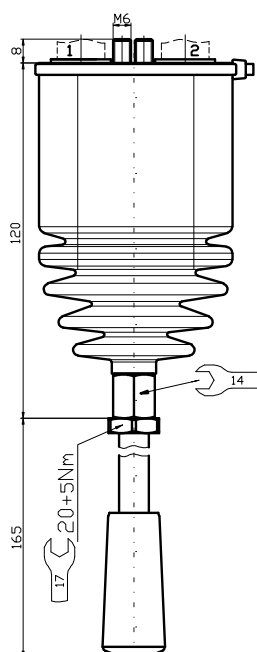Code: J1 ; J2 ; J3 ; J4




**GENERAL DESCRIPTION**

The directional control valve RMD90 provides a change of fluid flow direction in the channels of the hydraulic system. Valve RMD90 is designed for mounting in the hydraulic systems of the mobile and industrial machines.




**TECHNICAL DATA**

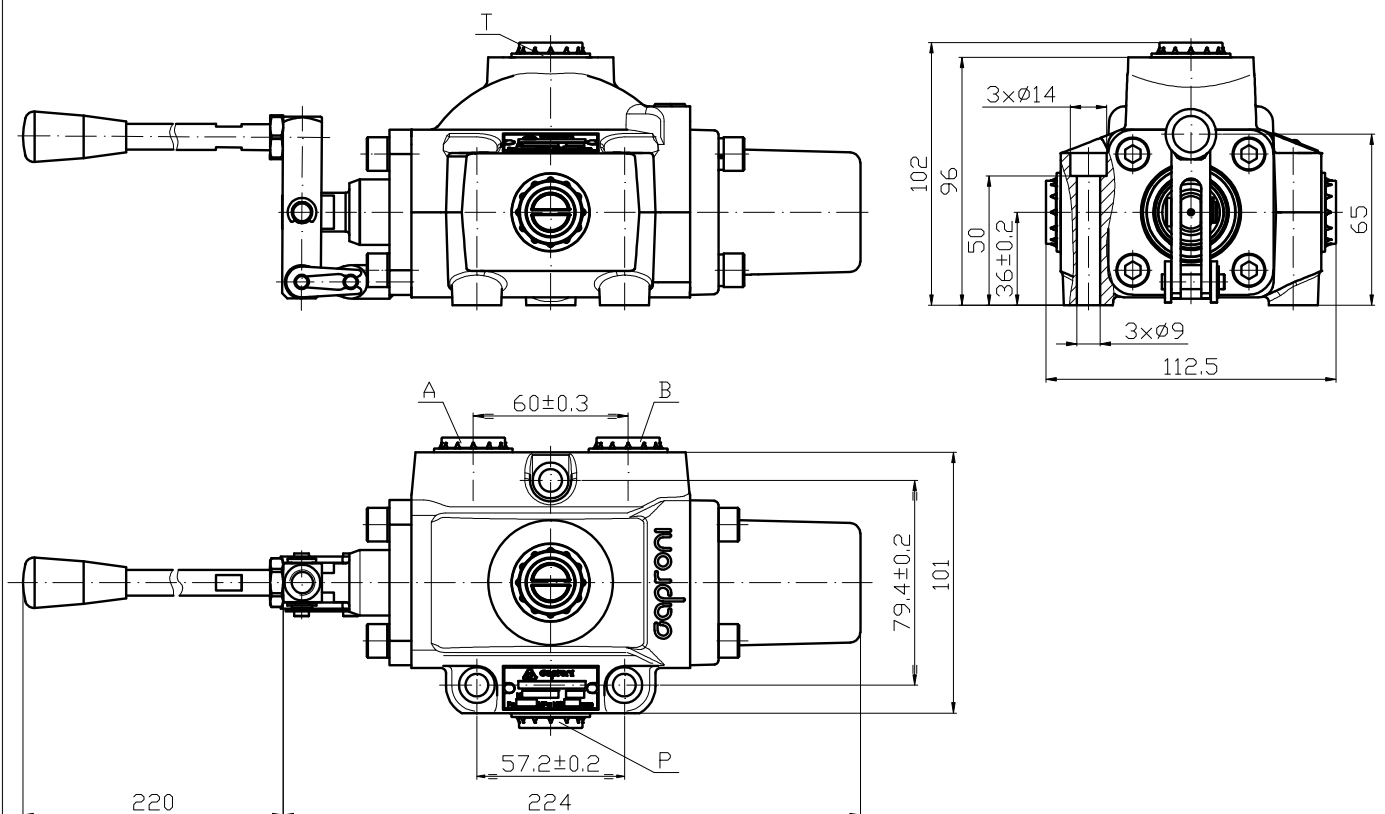Weight	5.7kg
Nominal flow	90 l/min
Maximal flow	150 l/min
Nominal pressure	16 MPa
Maximal pressure	20 MPa
Working stroke of the spool	$\pm 8$ mm
Spool leakage at $p=100\text{bar}$ $t=40^{\circ}\text{C}$ and viscosity 36cSt	25 cm <sup>3</sup> /min
Working fluid-hydraulic oil with parameters:	viscosity - 15...300cSt recommended viscosity - 20...80cSt temperature - $-20...+80^{\circ}\text{C}$ degree of filtration - 0,025mm




**DIMENSIONS**


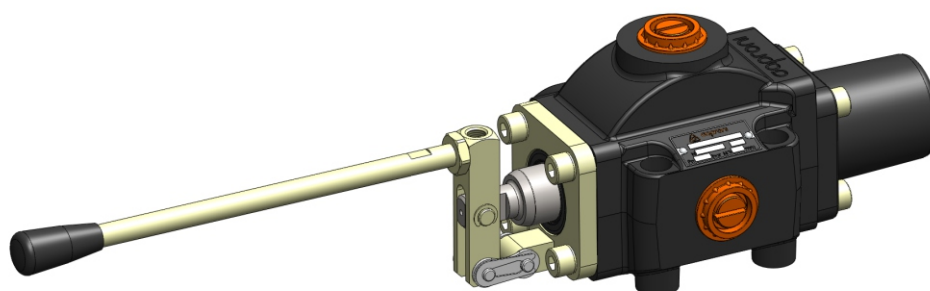
**ORDERING CODE**

RMD90 - 1 DL 1 G

Double acting , 3 position , 4 way A and B blocked in neutral		Code <b>1</b>
Double acting , 3 position , 4 way A , B and P to tank in neutral		Code <b>2</b>
Double acting , 3 position , 4 way A and B to tank in neutral		Code <b>3</b>
Lever :	with lever without lever	Code DL D


Code	P , T , A , B
G	G3/4"-A
K	K3/4"-14 GOST6111-52 (3/4"-14NPT)

Code	1	Spring return to neutral	
Code	2	Detent in position 1 and 2	
Code	3	Detent in three positions	



**GENERAL DESCRIPTION**

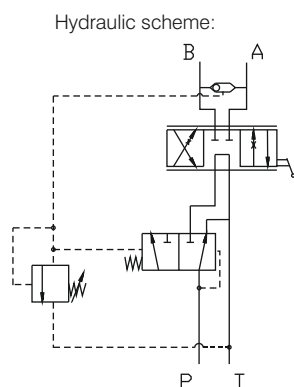1. The valve type MRP 70 incorporates the features of a 4-way directional control valve , an adjustable full range pressure compensated by-pass type flow control valve and a pilot operated pressure relief valve all in one compact package.
2. Less fittings and plumbing , eliminates leakage points.
3. Fine positive metering is possible in either direction with one manually adjustable , infinitely variable lever controlling both direction and amount of flow. Amount of flow is proportional to movement of the lever.
4. Flow is constant regardless of pressure variations , thus flow out the work port remains smooth and constant regardless of changes in load conditions.
5. An externally adjustable pilot relief is standard.
6. Friction detent (Friction positioner kit).



**TECHNICAL DATA**

DATA	UNIT	VALUE/RANGE
Rated flow	l/min (US GPM)	70 (18)
Rated pressure	bar (PSI)	210 (3000)
Standard port size: Inlet & outlet work ports A & B	BSP BSP	3/4" 1/2"
Working liquid - hydraulic oils with parameters: -viscosity -recommended viscosity -temperature -degree of filtration Leakage at p=100bar t=40oC ; 36cSt	mm <sup>2</sup> /sec (cSt) mm <sup>2</sup> /sec (cSt) °C (°F) mm (in) cc/min	15...300 20...80 -20...+80 (-4...+176) 0.025 (9.8 10 <sup>-4</sup> ) 15



**PERFORMANCE CURVE**


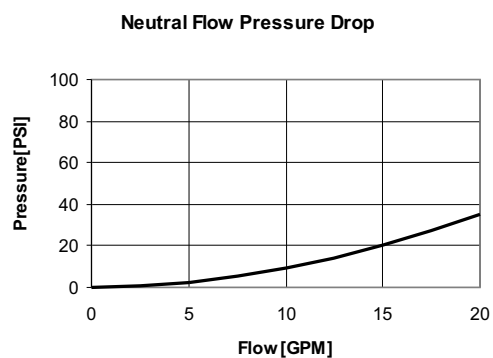
**CONDITIONS:**  
 $\Delta P = f(Q)$   
 36 cSt oil viscosity  
 $T = 40^\circ\text{C} (104^\circ\text{F})$



In this curve the pressure difference between the inlet and outlet is shown.



**DIMENSIONS**

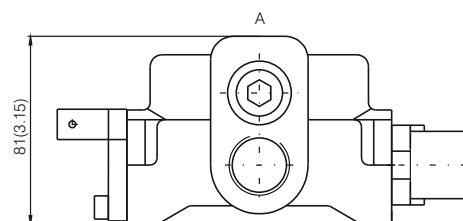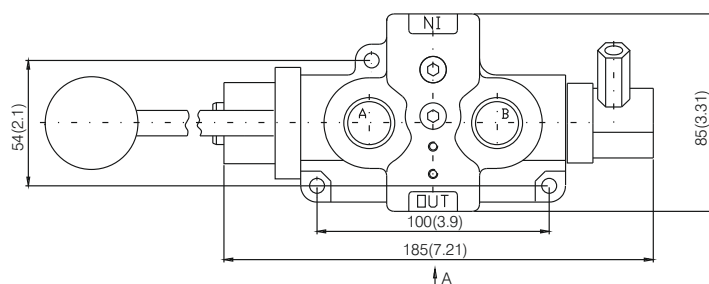All dimensions are in mm (in).





**GENERAL DESCRIPTION**

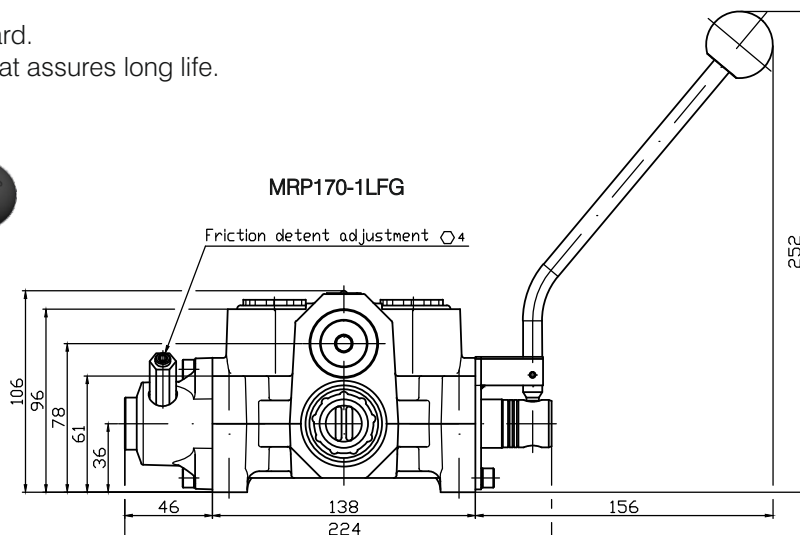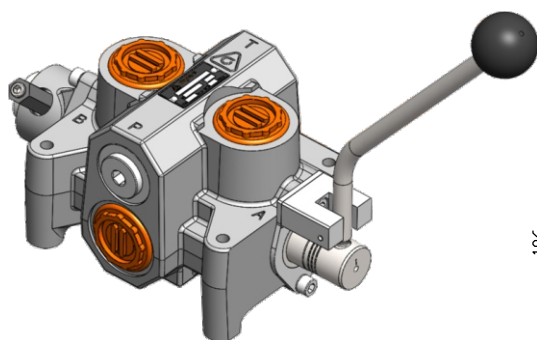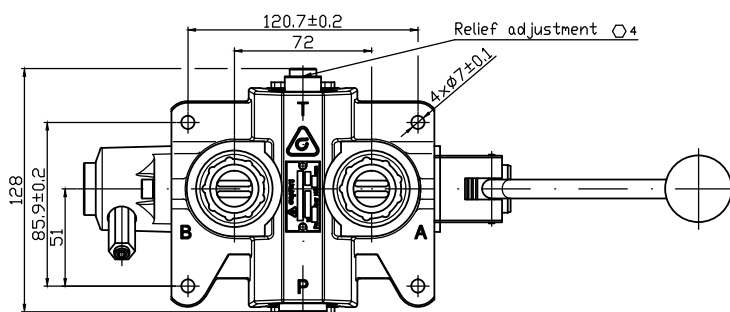1. The valve type MRP170 incorporates the features of a 4-way directional control valve , an adjustable full range pressure compensated by-pass type flow control valve and a pilot operated pressure relief valve all in one compact package.
2. Less fittings and plumbing , eliminates leakage points.
3. Fine positive metering is possible in either direction with one manually adjustable , infinitely variable lever controlling both direction and amount of flow. Amount of flow is proportional to movement of the lever.
4. Flow is constant regardless of pressure variations , thus flow out the work port remains smooth and constant regardless of changes in load conditions.
5. An externally adjustable pilot relief is standard.
6. Precision ground chromium plated spool that assures long life.





Hydraulic scheme:


**TECHNICAL DATA**

DATA	UNIT	VALUE/RANGE
Rated flow	l/min	170
Rated pressure P , A & B T	bar	210 30
Pressure control valve setting range	bar	30...300
Spool working stroke	mm	±8,5
Working liquid - hydraulic oils with parameters: -viscosity -recommended viscosity -temperature -degree of filtration	mm <sup>2</sup> /sec (cSt) mm <sup>2</sup> /sec (cSt) °C mm	15...300 20...80 -20...+80 0,025
Leakage at p=100bar t=40oC ; 46cSt	cc/min	60
Weight	kg	7



**ORDERING CODE**







MRP170 - 1 L F G T

spools	Code
	1
	2

Code	application
omit	Normal
T	Tropical (Stainless Steel Spool and Lever, Painted Body)

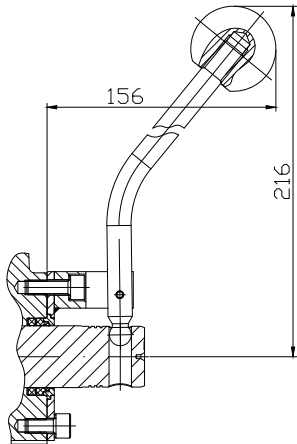
standard port threads	
Code	P, A, B, T
G	G1"
N	3/4"-14NPT
U	1"5/16-12UN

operation control	Code
with standard hand lever 	L
without lever with dust-proof plate 	Z

Code	spool control
F	 Friction detent with neutral position detent
1	
2	
3	
4	
5	



**PERFORMANCE CURVE**

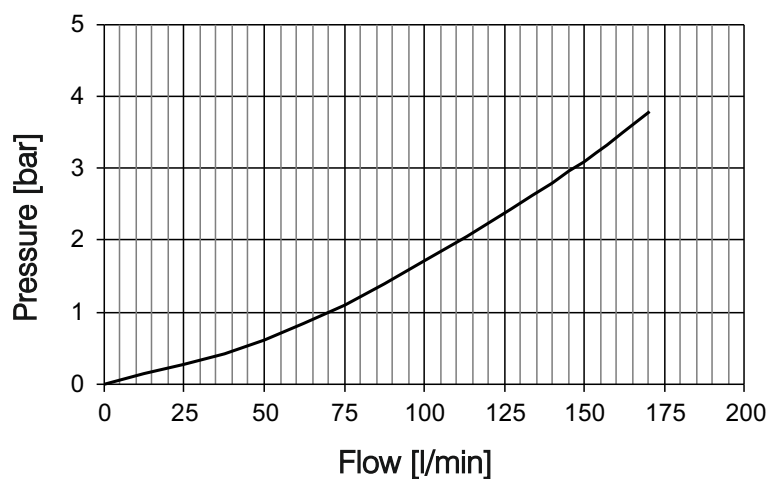Neutral Flow Pressure Drop




**CONDITIONS:**  
 $\Delta P = f(Q)$   
 36 cSt oil viscosity  
 $T = 40^\circ\text{C} (104^\circ\text{F})$

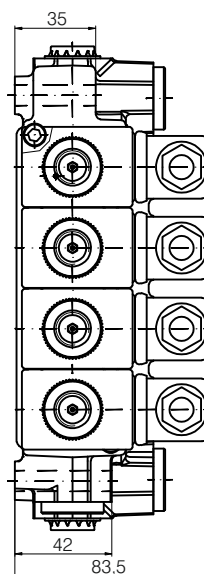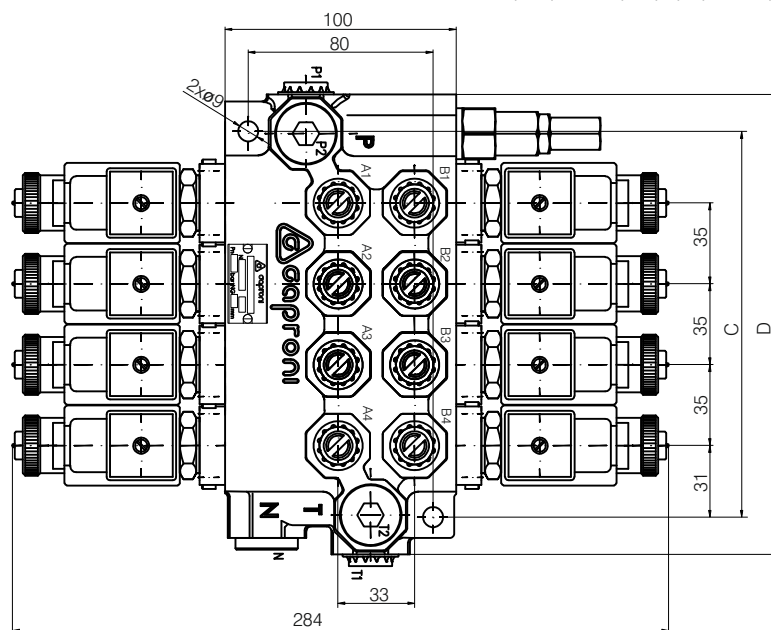RME40P/04/Q210/4x/1/R/P1T1/G/N/24D - example



HYDRAULIC SCHEME

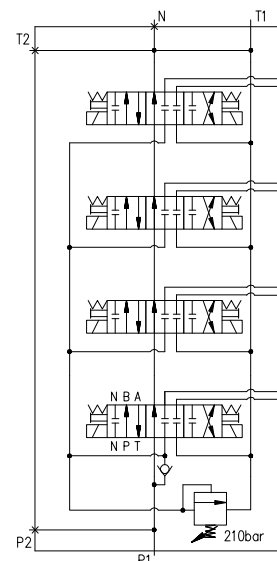

spool number	C[mm]	D[mm]	spool number	C[mm]	D[mm]
1	62	87	4	167	199
2	97	129	5	202	234
3	132	164	6	237	269



## ORDERING CODE

RME40P / 0 4 / Q / 1\*\* / R / P1T1 / G / N / 24D

connection	Code
parallel connection (for 1 spool valve - without code)	P

common check valve	Code
with check valve (for 1 spool valve - without code)	O
without check valve	N

number of the spools - (for 1 spool valve -without code)	Code 2 ... 6
---	-----------------

relief valve	Code
setting range 5...250bar (example of required settings 180bar)	Q Q180
without valve-shut-off plug installed	K

spools	Code
	1
	2

Code	application
N	normal
T	tropical

Code	supply voltage
12D	12V DC
24D	24V DC

standard port threads			
Code	P1, P2	A, B	T1, T2, N
M	M22x1,5-6H	M18x1,5-6H	M22x1,5-6H
G	G1/2"-A	G3/8"-A	G1/2"-A
U	7/8-14UNF-2B	3/4-16UNF-2B	7/8-14UNF-2B
G1/2	G1/2"-A		

Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

**\*\* Repeat for each spool. In case of identical spools for 3-sectional valve example ordering code is:**  
RME40P / 03 / Q / 3x / 1 / R / P1T1 / G / N / 24D

**TECHNICAL DATA**
**GENERAL**

DATA	UNIT	VALUE/RANGE
Max. ambient temperature	°C	-20...+50
Valve weight:		
1 spool		3,300
2 spools		5,500
3 spools		7,550
4 spools	kg	9,520
5 spools		11,700
6 spools		13,720

**HYDRAULIC**

Max. pressure	port P , A & B port T	MPa MPa	25 5
Max. flow (see characteristics)		l/min	50
Hydraulic fluid-mineral oil:			
-viscosity	mm <sup>2</sup> /s		10...800
-filtration degree	mm		0.025
-temperature	°C		-20...80
Max. internal leakage A(B)>T : (at p=120bar , viscosity 35cSt)		cm <sup>3</sup> /min	30

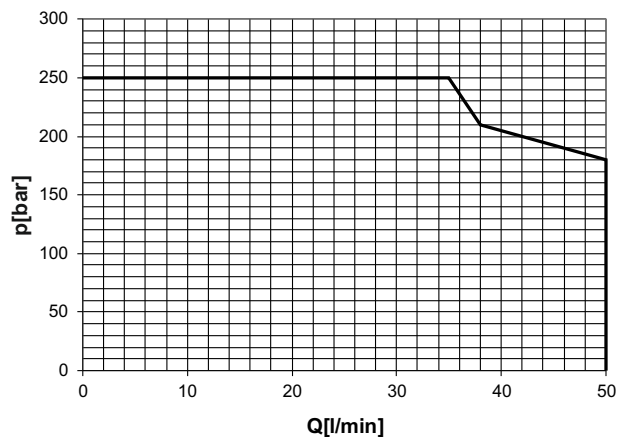
**ELECTRICAL**

Cyclic duration	%	ED100
Waterproof		IP65
Available voltages	V	12DC      24DC
Voltage tolerance	%	±10
Power consumption	W	37


**CHARACTERISTICS**

All characteristics are measured with hydraulic oil - ISO VG32 ,  $t=45\pm5^{\circ}\text{C}$


Functional limit




Pressure drop P to T

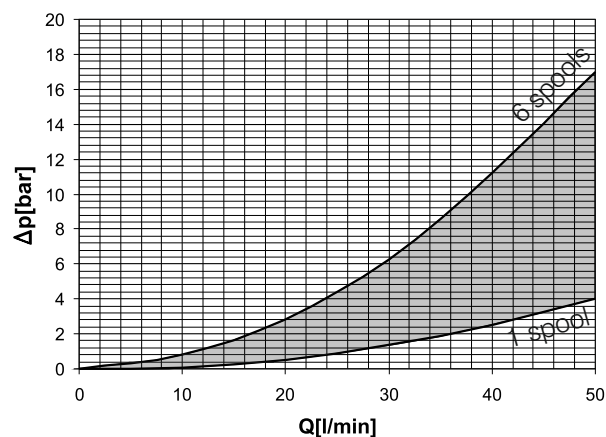


Pressure drop P to A&B

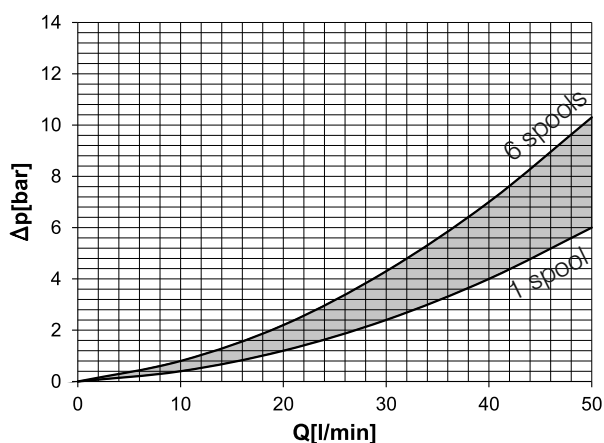


Pressure drop A&B to T

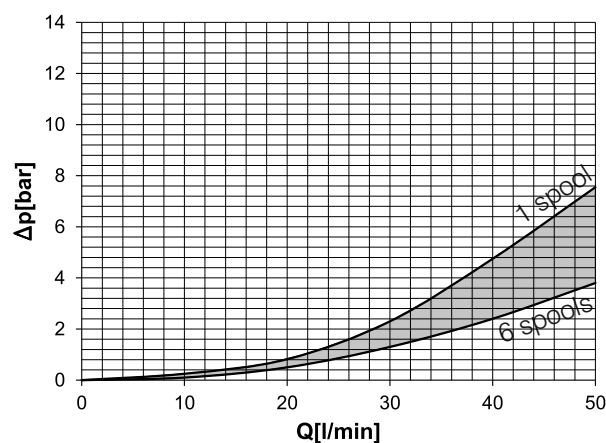

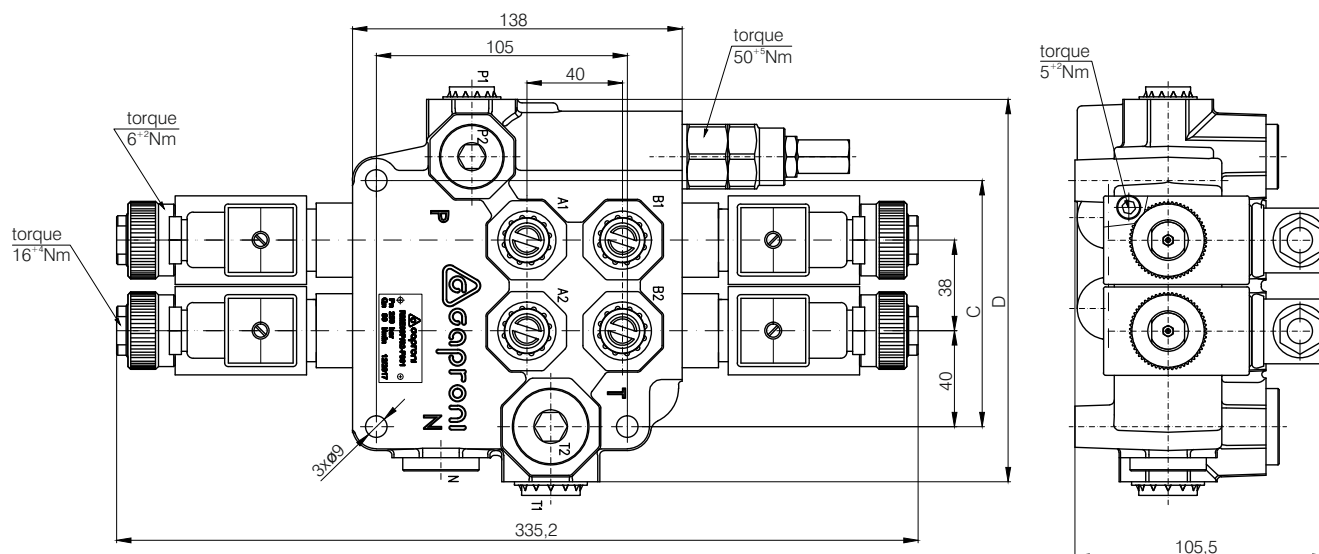
RME80P/02/Q210/2x1/R/P1T1/G/N/24D - example



HYDRAULIC SCHEME

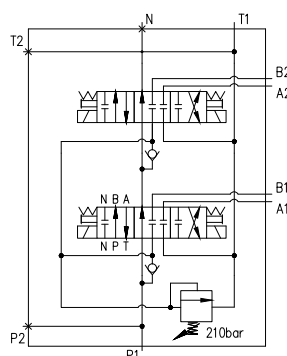

spool number	C[mm]	D[mm]
1	65	108
2	103	160
3	141	198
4	179	236
5	217	274
6	255	312

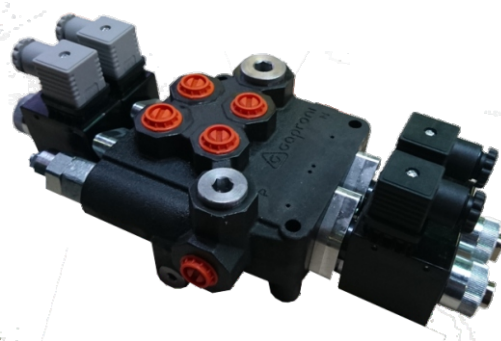

## ORDERING CODE

RME80P / 2 / Q / 1\*\* / R / P1T1 / G / N / 24D

connection	Code
parallel connection (for 1 spool valve - without code)	P

number of the spools - (for 1 spool valve -without code)	Code
2 ... 6	

relief valve	Code
setting range 20...300bar (example of required settings 180bar)	Q
shut-off plug installed	K

spools	Code
	1
	2

Code	application
N	normal
T	tropical

Code	supply voltage
12D	12V DC
24D	24V DC

Code	standard port threads
P1, P2, A, B	T1, T2, N
M	M22x1,5-6H M26x1,5-6H
G	G1/2"-A G3/4"-A
U	7/8-14UNF-2B 1 1/16-12UN-2B

Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

\*\* Repeat for each spool. In case of identical spools for 3-sectional valve example ordering code is:  
RME80P / 3 / Q / 3x1 / R / P1T1 / G / N / 24D



**TECHNICAL DATA**
**GENERAL**

DATA	UNIT	VALUE/RANGE
Max. ambient temperature	°C	-20...+50
Valve weight:		
1 spool		4,010
2 spools		7,340
3 spools		9,750
4 spools	kg	12,200
5 spools		14,400
6 spools		16,000

**HYDRAULIC**

Max. pressure	port P , A & B port T	MPa MPa	25 5
Max. flow (see characteristics)		l/min	80
Hydraulic fluid-mineral oil:			
-viscosity	mm <sup>2</sup> /s		10...800
-filtration degree	mm		0.025
-temperature	°C		-20...80
Max. internal leakage A(B)>T : (at p=120bar , viscosity 35cSt)		cm <sup>3</sup> /min	40

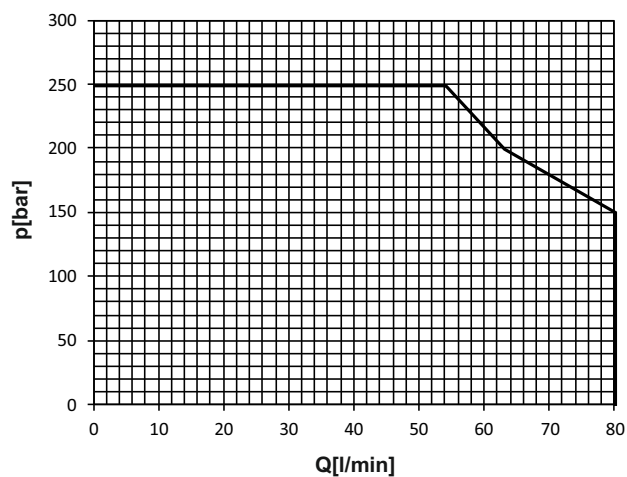
**ELECTRICAL**

Cyclic duration	%	ED100
Waterproof		IP65
Available voltages	V	12DC      24DC
Voltage tolerance	%	±10
Power consumption	W	60


**CHARACTERISTICS**

All characteristics are measured with hydraulic oil - ISO VG32 ,  $t=45\pm5^{\circ}\text{C}$


Functional limit




Pressure drop P to T

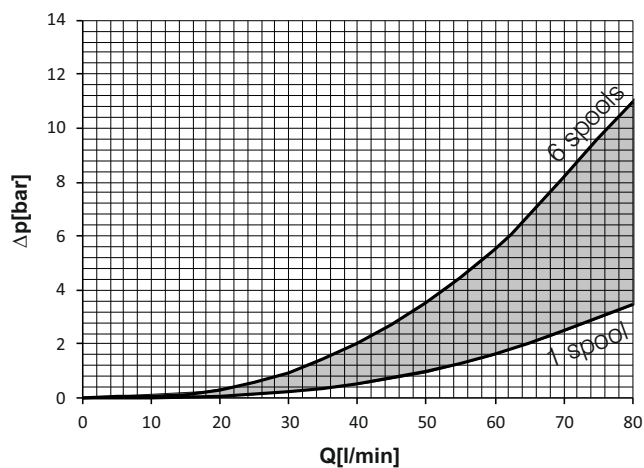


Pressure drop P to A&B

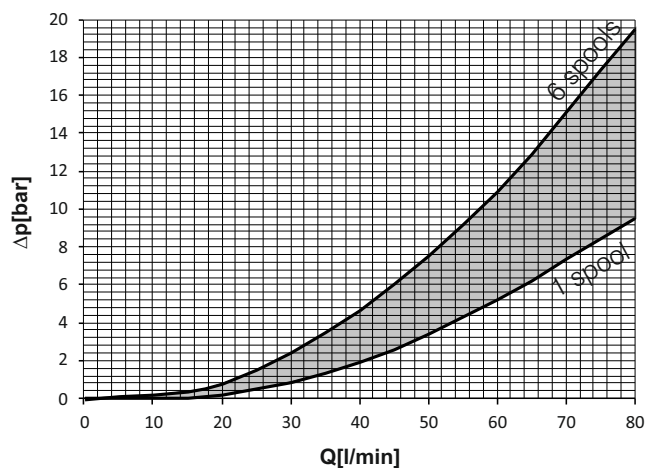


Pressure drop A&B to T

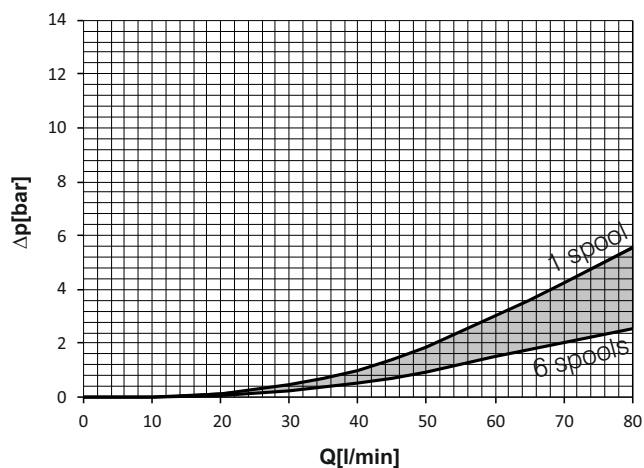

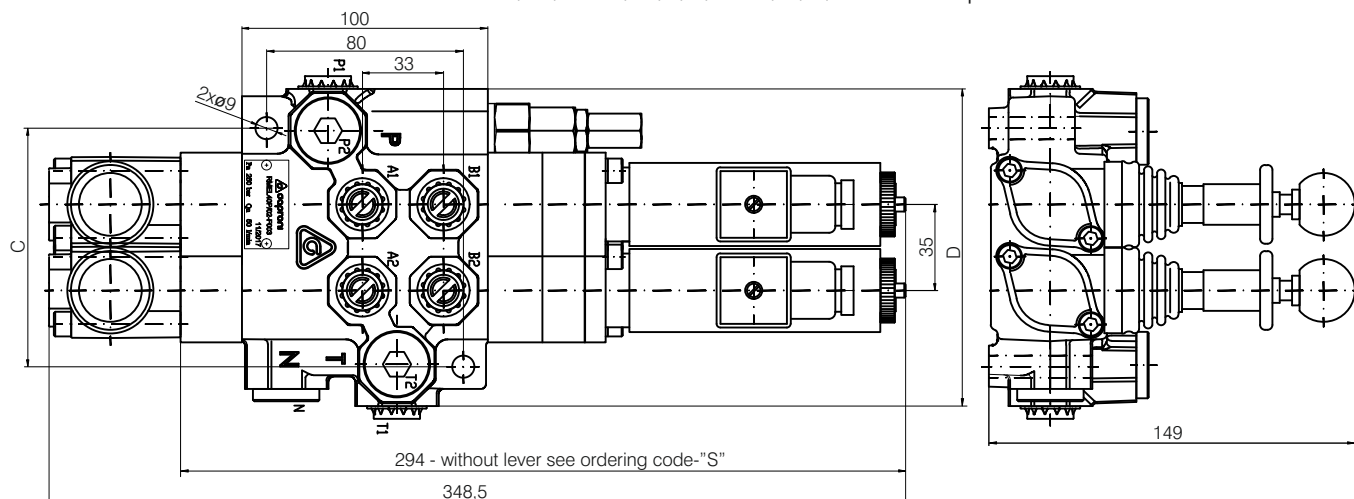RMEL40P/02/Q210/2x1/R/P1T1/G/N/24D - example



HYDRAULIC SCHEME

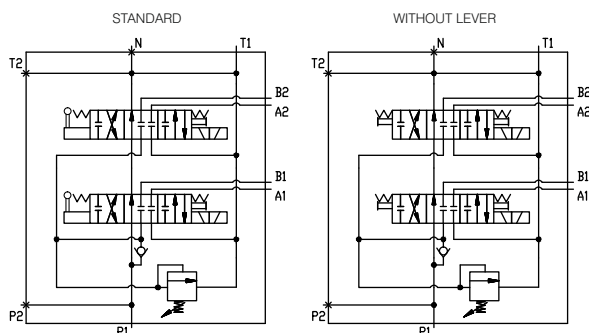

spool number	C[mm]	D[mm]
1	62	87
2	97	129
3	132	164
4	167	199
5	202	234
6	237	269



## ORDERING CODE

RMEL40P / 0 4 / Q / 1\*\* / R / P1T1 / G / N / 24D / ...

connection	Code
parallel connection (for 1 spool valve - without code)	P

common check valve	Code
with check valve (for 1 spool valve - without code)	O
without check valve	N

number of the spools - (for 1 spool valve -without code)	Code
2 ... 6	

relief valve	Code
setting range 5...250bar (example of required settings 180bar)	Q
without valve-shut-off plug installed	K

spools	Code
	1
	2

Code	application
N	normal
T	tropical

Code	supply voltage
12D	12V DC
24D	24V DC

Code	emergency lever
	with lever(standard)- without code
S	without lever-end cap

standard port threads			
Code	P1 , P2	A , B	T1 , T2 , N
M	M22x1,5-6H	M18x1,5-6H	M22x1,5-6H
G	G1/2"-A	G3/8"-A	G1/2"-A
U	7/8-14UNF-2B	3/4-16UNF-2B	7/8-14UNF-2B
G1/2	G1/2"-A		

Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

\*\* Repeat for each spool. In case of identical spools for 3-sectional valve example ordering code is:  
RMEL40P / 03 / Q / 3x / 1 / R / P1T1 / G / N / 24D



## TECHNICAL DATA

## GENERAL

DATA	UNIT	VALUE/RANGE
Max. ambient temperature	°C	-20...+50
Valve weight:		
1 spool		3,850
2 spools		4,960
3 spools		5,900
4 spools	kg	6,760
5 spools		7,800
6 spools		8,760


## HYDRAULIC

Max. pressure	port P , A & B port T	MPa MPa	25 2
Max. flow (see characteristics)		l/min	50
Hydraulic fluid-mineral oil:			
-viscosity	mm <sup>2</sup> /s		10...800
-filtration degree	mm		0.025
-temperature	°C		-20...80
Max. internal leakage A(B)>T : (at p=120bar , viscosity 35cSt)		cm <sup>3</sup> /min	30

## ELECTRICAL

Cyclic duration	%	ED100
Waterproof		IP65
Available voltages	V	12DC      24DC
Voltage tolerance	%	±10
Power consumption	W	54

## ELECTRIC WIRING




connection	
1-2	solenoid pull / P to A resp. B to T
1-3	solenoid push / P to B resp. A to T

## CHARACTERISTICS

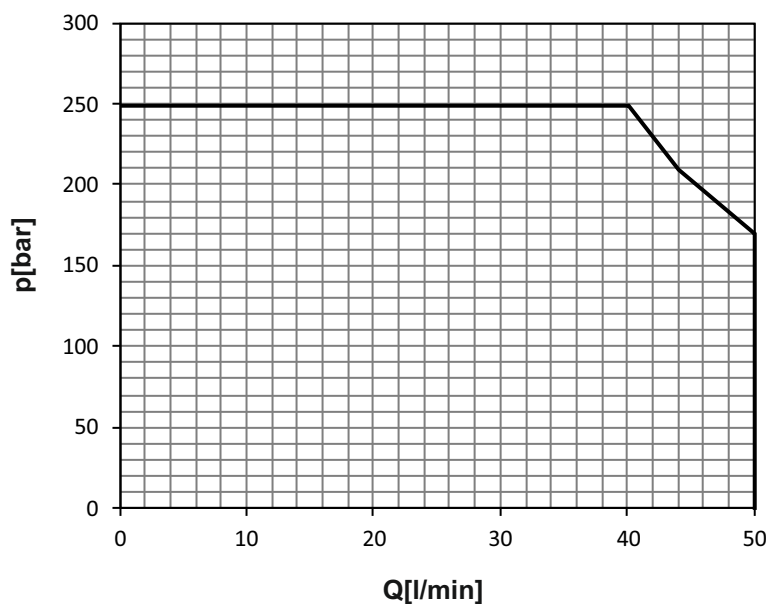Measured with hydraulic oil - ISO VG32 ,  $t=45\pm5^{\circ}\text{C}$


Functional limit



## EMERGENCY LEVER

rest position (0)-locked

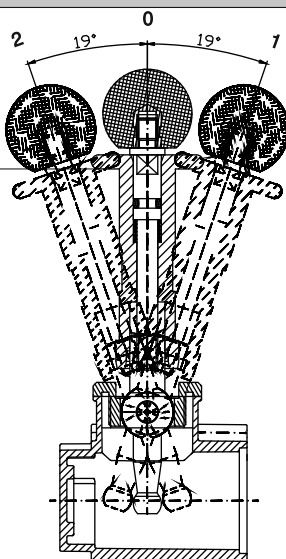pull to unlock and push to desired trigger position




Only the rest position is locked !

The lever was designed as emergency lever - in case of electric power failure and is not recommended for continuous use !





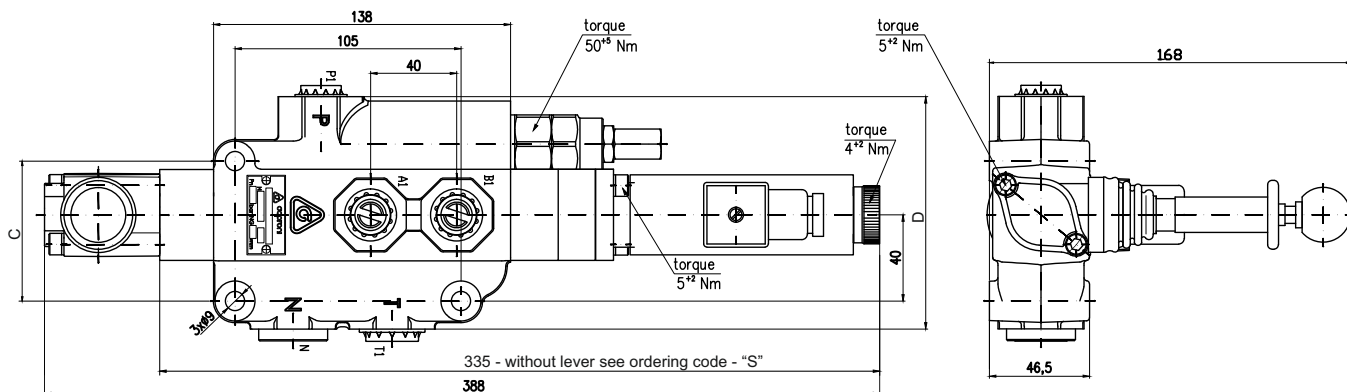RMEL80/Q210/1/R/P1T1/G/N/24D - example



spool number	C[mm]	D[mm]	spool number	C[mm]	D[mm]
1	62	87	4	167	199
2	97	129	5	202	234
3	132	164	6	237	269

#### HYDRAULIC SCHEME

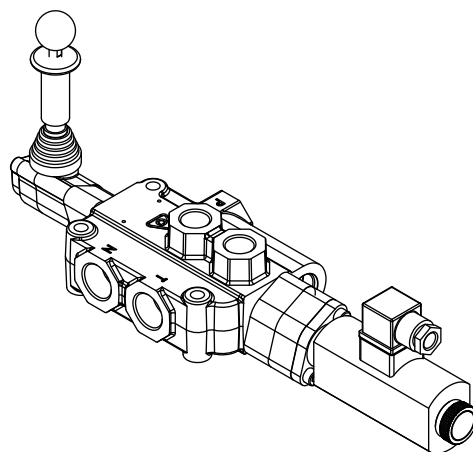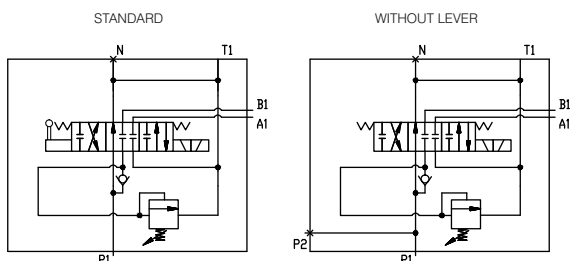

### ORDERING CODE

RMEL80P / 4 / Q / 1\*\* / R / P1T1 / G / N / 24D / ...

connection	Code
parallel connection (for 1 spool valve - without code)	P

number of the spools - (for 1 spool valve -without code)	Code
2 ... 6	

relief valve	Code
setting range 5...250bar (example of required settings 180bar)	Q
without valve-shut-off plug installed	K

spools	Code
	1
	2

Code	application
N	normal
T	tropical

Code	supply voltage
12D	12V DC
24D	24V DC

Code	emergency lever
	with lever(standard)-without code
S	without lever-end cap

standard port threads		
Code	P1, P2, A, B	T1, T2, N
M	M22x1,5-6H	M26x1,5-6H
G	G1/2"-A	G3/4"-A
U	7/8-14UNF-2B	1 1/16-12UN-2B

Code	hydraulic power output
R	open center (port N connected to T - short plug)
W	closed center (port N plugged - long plug)
C	carry over (port N - with power beyond sleeve)

Code	used conn. ports
P1T1	P1 and T1
P1T2	P1 and T2
P2T1	P2 and T1
P2T2	P2 and T2

\*\* Repeat for each spool. In case of identical spools for 3-sectional valve example ordering code is:  
RMEL80P / 03 / Q / 3x / 1 / R / P1T1 / G / N / 24D



## TECHNICAL DATA

## GENERAL

DATA	UNIT	VALUE/RANGE
Max. ambient temperature	°C	-20...+50
Valve weight:		
1 spool		5,900
2 spools		8,200
3 spools		9,600
4 spools	kg	11,000
5 spools		12,600
6 spools		14,000


## HYDRAULIC

Max. pressure	port P , A & B port T	MPa MPa	25 5
Max. flow		l/min	80
Hydraulic fluid-mineral oil:			
-viscosity	mm <sup>2</sup> /s		10...800
-filtration degree	mm		0.025
-temperature	°C		-20...80
Max. internal leakage A(B)>T : (at p=120bar , viscosity 35cSt)		cm <sup>3</sup> /min	40

## ELECTRICAL

Cyclic duration	%	ED100
Waterproof		IP65
Available voltages	V	12DC      24DC
Voltage tolerance	%	±10
Power consumption	W	60

## ELECTRIC WIRING




connection	
1-2	solenoid pull / P to A resp. B to T
1-3	solenoid push / P to B resp. A to T




## CHARACTERISTICS

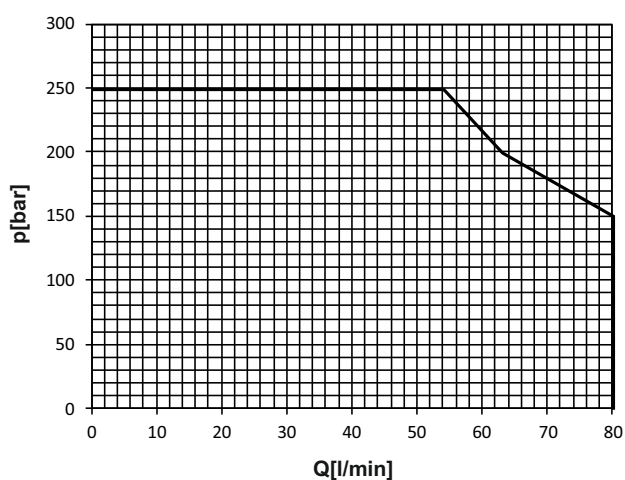All characteristics are measured with hydraulic oil - ISO VG32 ,  $t=45\pm 5^{\circ}\text{C}$


Functional limit




Pressure drop P to T

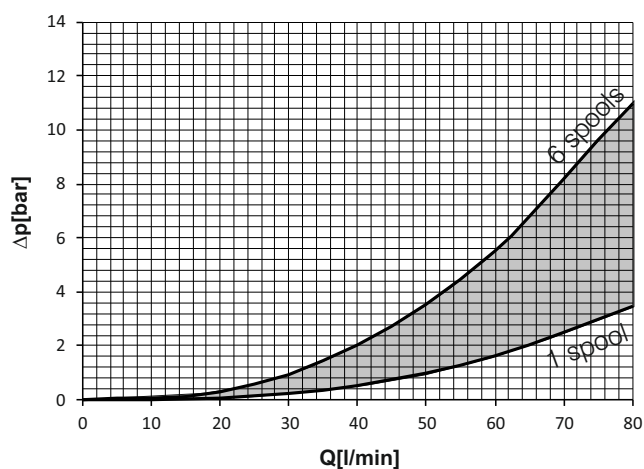

Pressure drop P to A&B

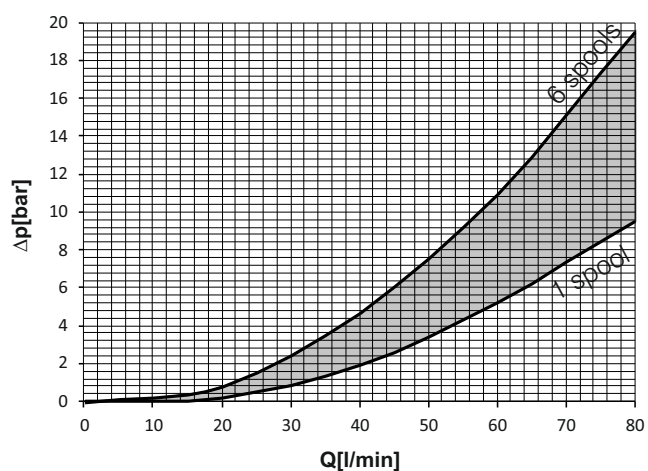


Pressure drop A&B to T

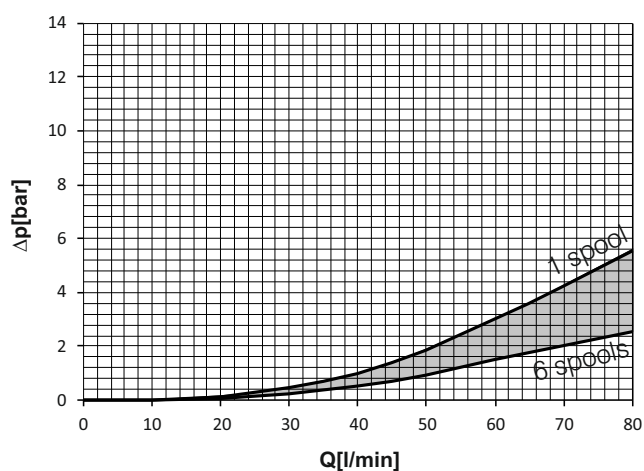

## EMERGENCY LEVER

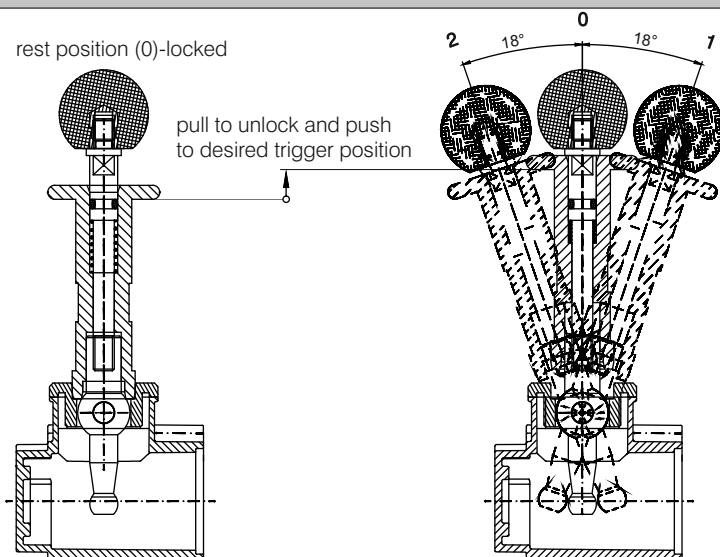rest position (0)-locked




Only the rest position is locked !

The lever was designed as emergency lever - in case of electric power failure and is not recommended for continuous use !







caproni

BULGARIA JOINT-STOCK COMPANY

BULGARIA , 6100 KAZANLAK , 45 STOLETOV STR.

TEL.:+359/431/62 229 , +359/431/6132 ,

FAX:+359/431/62 230 , +359/431/63 134

E-MAIL:CAPRONI@CAPRONI.BG , WEB:HTTP://WWW.CAPRONI.BG